

ELECTI DOUBLE SQUARE

LED surface type
downlight



Aluminum injection body
High efficiency reflector
Constant current LED driver
Elec rostatic powder coating paint
Optional body colors
ENEC Standards
Made in TURKEY



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 19°, 40°
W	White Body Color

PRODUCT	CODE	W	Height	Lenght	Temp	Lumen*
ELECDB.14.95x185.N.4.19		14	110	95x185	4000K	1540
ELECDB.14.95x185.N.4.40		14	110	95x185	4000K	1500
ELECDB.20.95x185.N.4.19		20	110	95x185	4000K	2140
ELECDB.20.95x185.N.4.40		20	110	95x185	4000K	2100
ELECDB.26.95x185.N.4.19		26	110	95x185	4000K	2520
ELECDB.26.95x185.N.4.40		26	110	95x185	4000K	1482

* According to 4000K light temperature

REFLECTOR OPTIONS




CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black Body Color	EMERGENT KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	on/off	1-10V	PUSH TRIAC DALI	3K 4K 6.5K	XX
XX XX XX	N	V	P T D	3 4 6	XX

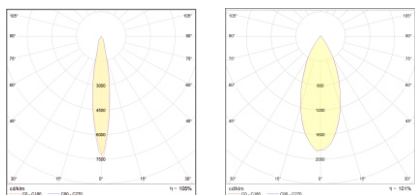

TECHNICAL DRAWINGS



* For different options, please contact our team.