

FACIEM S

Linear In-Ground



A recessed slim inground. Faciem stands for pure light: it produces a light beam which is important when switched on, to disappear from view once it is off.

Those features, with the simple ease of installation, allow Faciem to be used as a single light point or in series on the floor to highlight even individual architectural elements such as statues to the utmost. The luminaire is 24VDC. It makes architecture the protagonist and creates suggestive light paths thanks to its excellent lighting performance and high versatility of use.

Luminaire comes with 1 side cable as standard. 2 Sides are optional.

Key Advantages

- Slim for modern designs.
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Characteristics

Aluminum Injection Die Cast Body

Electrostatic Powder Paint

Optional RAL Colors

Extra Clear 5mm Tempered Glass

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

ENEC Certified Driver

PMMA Diffuser

Applications



Landscape




Outdoor



Urban



Architectural

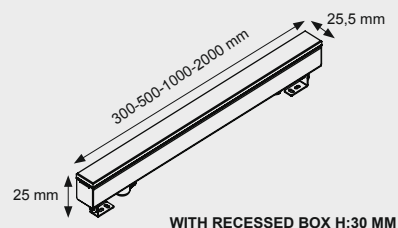


Standard Product

Input	24V / DC
Control	On / Off
Optic	120°
Light Color	2800K
Body Color	7016 Grey
Frame	Stainless Steel
CRI	> 82
Protection	IP67
Impact Resistance	IK10
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C
Cabling	Single Side

Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
Glass	Frosted Diffuser Glass
CRI	> 90
Protection	IP68
Warranty	7-10 Years
Cable	2 Sides
Connector	IP68

Light Colors




Ordering Details

Product Code	Power	Length	Light Color	Lumen
FACIEM.S.3.AC.N.300.28.120.7016	3W	300mm	2800K	270lm
FACIEM.S.4.AC.N.500.28.120.7016	4W	500mm	2800K	360lm
FACIEM.S.6.AC.N.1000.28.120.7016	6W	1000mm	2800K	540lm
FACIEM.S.7.AC.N.1500.28.120.7016	7W	1500mm	2800K	630lm
FACIEM.S.9.AC.N.2000.28.120.7016	9W	2000mm	2800K	810lm

* For different options, please contact our team.


Body Colors Options



Beam Angle Options



Optional Accessories



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	XX	AC DC	ON/OFF 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX XX	AC DC	N V	P T D	3 4 6	XX	XX