


FALCON L

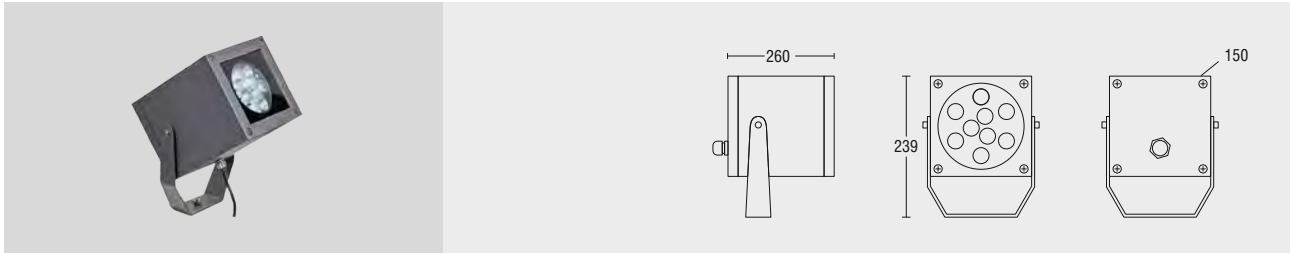

Standard Product

Input	100-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Surge protection	1KV
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
Glass	Frosted Diffuser Glass
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years

Light Colors




Ordering Details

Product Code	Power	Light Color	Beam Angle	Lumen
FALCONL.15.AC.N.4.30.7016	15W	4000K	30°	1950
FALCONL.20.AC.N.4.30.7016	20W	4000K	30°	2600
FALCONL.30.AC.N.4.30.7016	30W	4000K	30°	4230

* For different options, please contact our team.

Beam Angle Options

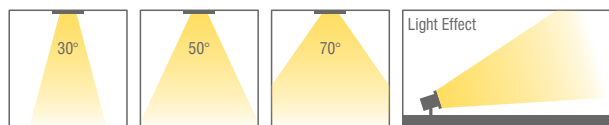

Body Colors Options



Optional Accessories



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC on/off 1-10V	PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX