

FLINDPOLE

Outdoor Type Decorative Lighting
Poles



FLINDPOLE represent the maximum expression of love and respect for the tradition of great historical city centers.

This HB-LUX decorative classic layout is ideal for lighting public parks, squares or pedestrian areas. The urban lighting version is perfect to complement the public lighting of a park or a pedestrian area, ideal for adding elegance to an entrance or to enhance city parks, squares or pedestrian areas. with a classic-style décor is able to enhance the value of historic city centres giving them a timeless style.

Characteristics

Aluminium body
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

Key Advantages

- Aluminium Body
- Smart energy savings
- Delivery of complete assembly
- Corrosion resistance

Applications



Landscape




Outdoor



Urban


FLINDPOLE

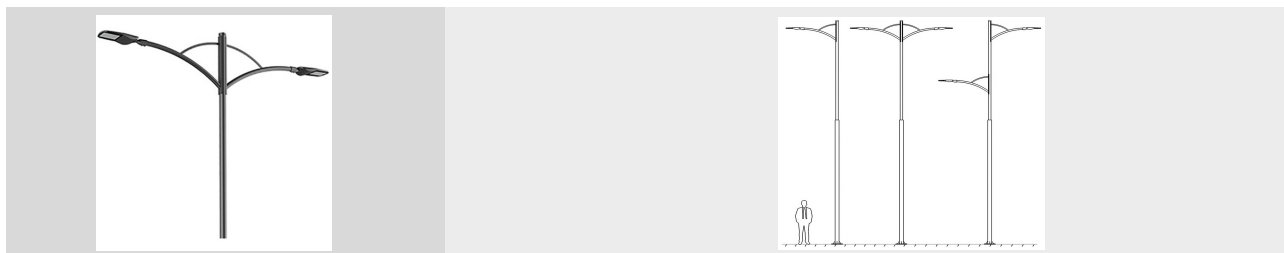


Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	> 82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C


Light Colors



Body Colors Options

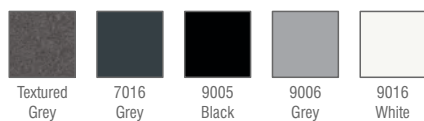

Light Effect



Optional Accessories



IP67
Junction
Box

Available Options

** Possibility of production in different lengths and sections.*

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	> 90
Protection	IP67
Warranty	7-10 Years

Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
FLINDPOLE.30.AC.N.4.SYM.7016	30W	4000K	4000	3665
FLINDPOLE.40.AC.N.4.SYM.7016	40W	4000K	4000	4800
FLINDPOLE.50.AC.N.4.SYM.7016	50W	4000K	4000	6012
FLINDPOLE.60.AC.N.4.SYM.7016	60W	4000K	4000	7200
FLINDPOLE.30.AC.N.4.SYM.7016	30W	4000K	5000	3665
FLINDPOLE.40.AC.N.4.SYM.7016	40W	4000K	5000	4800
FLINDPOLE.50.AC.N.4.SYM.7016	50W	4000K	5000	6012
FLINDPOLE.60.AC.N.4.SYM.7016	60W	4000K	5000	7200
FLINDPOLE.30.AC.N.4.SYM.7016	30W	4000K	6000	3665
FLINDPOLE.40.AC.N.4.SYM.7016	40W	4000K	6000	4800
FLINDPOLE.50.AC.N.4.SYM.7016	50W	4000K	6000	6012
FLINDPOLE.60.AC.N.4.SYM.7016	60W	4000K	6000	7200
FLINDPOLE.30.AC.N.4.SYM.7016	30W	4000K	7000	3665
FLINDPOLE.40.AC.N.4.SYM.7016	40W	4000K	7000	4800
FLINDPOLE.50.AC.N.4.SYM.7016	50W	4000K	7000	6012
FLINDPOLE.60.AC.N.4.SYM.7016	60W	4000K	7000	7200
FLINDPOLE.30.AC.N.4.SYM.7016	30W	4000K	8000	3665
FLINDPOLE.40.AC.N.4.SYM.7016	40W	4000K	8000	4800
FLINDPOLE.50.AC.N.4.SYM.7016	50W	4000K	8000	6012
FLINDPOLE.60.AC.N.4.SYM.7016	60W	4000K	8000	7200

** For different options, please contact our team.*



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	XX	AC DC	ON/OFF 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX	XX
XX XX	AC DC	N V	P T D	3 4 6	XX XX	

www.hb-lux.com