

GOLD

Outdoor type
LED Bollard Lighting



GOLD combines sober shapes, variety of optics and a sturdy structure, enhancing both residential and urban environments with its pleasant design and a diffused, comfortable lighting, avoiding glare and lighting pollution.

Gold's light effect exceeds all expectations. The unique design of this outdoor bollard and the positioning of the 20 W power led create a wide beam and a powerful play of light that will give your project an expressive and architectural character. Thanks to the indirect position of the LED, there is no risk of direct exposure or glare, without compromising on the light output. Gold can be installed on any hard surface and planted in any lawn if the bollard is associated with a stake.

Characteristics

| |
|--|
| Aluminium body |
| High Efficiency LED Lighting |
| PMMA acrylic light diffuser |
| Electrostatic powder paint |
| High quality silicon gasket |
| Anchor system |
| LED with Life Span > 100.000 Hours |
| CCT tolerance within a 3 step MacAdams ellipse |
| Corrosion Protection |
| 5 Years Warranty |
| Marine Coating (Optional) |
| ENEC Certified Driver |

Key Advantages

- Glare-free
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- Interesting light sculpture

Applications



Landscape




Outdoor



Urban

GOLD

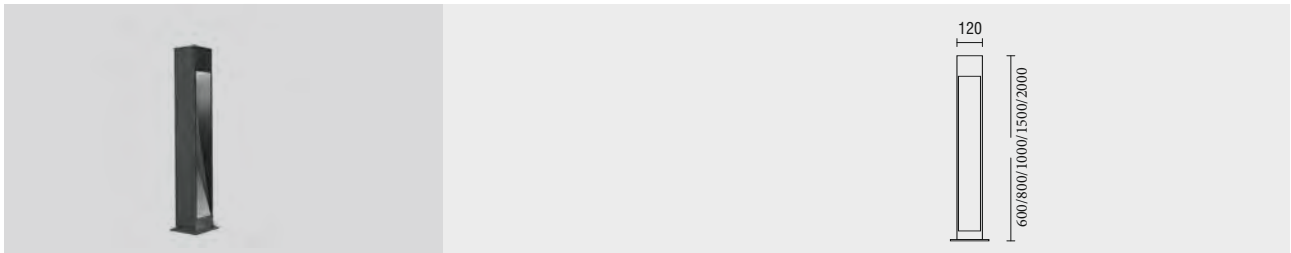

Standard Product

| | |
|----------------------|-----------------------|
| Input | 100-305V / AC 50-65Hz |
| Control | On / Off |
| Optic | Symmetrical |
| Light Color | 4000K |
| Body Color | 7016 Grey |
| CRI | >82 |
| Protection | IP66 |
| Impact Resistance | IK09 |
| Protection class IEC | Class I |
| Power factor (min.) | 0,092 |
| Weight | - kg |
| Ambient Temperature | -30°C / +60°C |
| Diffuser | Acrylic |


Available Options

| | |
|-------------------|--|
| Input | 24V / DC |
| Control | RGB, DALI, DIM, DMX |
| Optic | 8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical |
| Light Color | 2200K, 2700K, 3000K, 5000K, 6500K |
| Body Color | Optional RAL colors |
| CRI | >90 |
| Protection | IP67-IP68 |
| Impact Resistance | IK10 |
| Warranty | 7-10 Years |
| Diffuser | Transparent or Opaque |


Light Colors



Body Colors Options

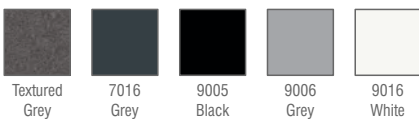

Light Effect



Ordering Details

| Product Code | Power | Light Color | Dimensions | Lumen |
|------------------------------|-------|-------------|------------|-------|
| GOLD.8.600.AC.N.4.SYM.7016 | 8W | 4000K | 600mm | 1056 |
| GOLD.10.600.AC.N.4.SYM.7016 | 10W | 4000K | 600mm | 1320 |
| GOLD.15.800.AC.N.4.SYM.7016 | 15W | 4000K | 800mm | 1980 |
| GOLD.20.800.AC.N.4.SYM.7016 | 20W | 4000K | 800mm | 2640 |
| GOLD.25.1000.AC.N.4.SYM.7016 | 25W | 4000K | 1000mm | 3300 |
| GOLD.30.1000.AC.N.4.SYM.7016 | 30W | 4000K | 1000mm | 3960 |
| GOLD.25.1500.AC.N.4.SYM.7016 | 25W | 4000K | 1500mm | 3300 |
| GOLD.30.1500.AC.N.4.SYM.7016 | 30W | 4000K | 1500mm | 3960 |
| GOLD.35.2000.AC.N.4.SYM.7016 | 35W | 4000K | 2000mm | 4620 |
| GOLD.40.2000.AC.N.4.SYM.7016 | 40W | 4000K | 2000mm | 5280 |

* For different options, please contact our team.



Optional Accessories



IP67
Junction
Box

Product Coding

| Product Name | Product Power | Input | Control System | Color Temperature | Light Beam | Body Color |
|--------------|---------------|-------|-----------------------------|-------------------|------------|------------|
| XX | XX | AC DC | on/off 1-10V PUSH TRAC DALI | 3K 4K 6.5K | XX | XX |
| XX | XX | AC DC | N V P T D | 3 4 6 | XX | XX |