



Aluminum injection body
High efficiency reflector
Constant current LED driver
Electrostatic powder coating paint
Optional body colors



BASIC OPTIONS


on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
	Light Beam 19°, 40°
W	White Body Color

PRODUCT CODE W Height Length Hole Size Temp Lumen*

GRACILMAG.1.35.4.19	1	39	Ø39,5	Ø35	4000K	110
GRACILMAG.2.35.4.19	2	39	Ø39,5	Ø35	4000K	220
GRACILMAG.3.35.4.19	3	39	Ø39,5	Ø35	4000K	330

According to 4000K light temperature

COLOR OPTIONS



White


Black

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	E

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX XX XX	XX XX XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX	XX	XX	N V P T D	3 4 6	XX

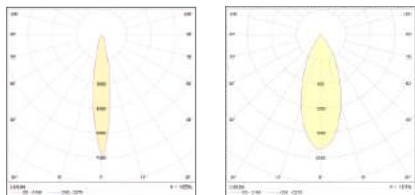

TECHNICAL DRAWINGS



* For different options, please contact our team.