



KUBIK P35

LED pendant type

square LED lighting fixture

Aluminum extruded body
Anodized coating
UV protected frosted diffuser
Adjustable length steel ropes
Nickel plated brass parts
Constant current LED driver
Electrostatic powder coating
paint Production in different
lengths Optional body colors
ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
Light Beam 120°	Light Beam 120°
White Satin Polycarbonate Diffuser	White Satin Polycarbonate Diffuser
B	Black Body Color
°C	-20°C/+40°C Temperature



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	White Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	○	W	E

* For different options, please contact our team.

PRODUCT CODE	W	Lenght	Temp	Lumen*
KUBIK.20.540x540.N.4.120	20	540x540	4000K	3200
KUBIK.44.540x540.N.4.120	44	540x540	4000K	4976
KUBIK.28.640x640.N.4.120	28	640x640	4000K	3320
KUBIK.52.640x640.N.4.120	52	640x640	4000K	5620
KUBIK.64.640x640.N.4.120	64	640x640	4000K	7418
KUBIK.76.640x640.N.4.120	76	640x640	4000K	7860
KUBIK.72.650x650.N.4.120	72	650x650	4000K	5976
KUBIK.36.740x740.N.4.120	36	740x740	4000K	4220
KUBIK.61.740x740.N.4.120	61	740x740	4000K	6190
KUBIK.54.750x750.N.4.120	54	750x750	4000K	5800
KUBIK.74.840x840.N.4.120	74	840x840	4000K	7152
KUBIK.79.940x940.N.4.120	79	940x940	4000K	8120
KUBIK.108.950x950.N.4.120	108	950x950	4000K	8856
KUBIK.85.1040x1040.N.4.120	85	1040x1040	4000K	9150
KUBIK.96.1140x1140.N.4.120	96	1140x1140	4000K	10200
KUBIK.105.1200x1200.N.4.120	105	1200x1200	4000K	11088
KUBIK.153.1200x1200.N.4.120	153	1200x1200	4000K	15920
KUBIK.192.1500x1500.N.4.120	192	1500x1500	4000K	20100
KUBIK.176.2000x2000.N.4.120	176	2000x2000	4000K	18420
KUBIK.256.2000x2000.N.4.120	256	2000x2000	4000K	26880
KUBIK.320.2500x2500.N.4.120	320	2500x2500	4000K	32254
KUBIK.264.3000x3000.N.4.120	264	3000x3000	4000K	27720
KUBIK.384.3000x3000.N.4.120	384	3000x3000	4000K	40120

TECHNICAL DRAWINGS

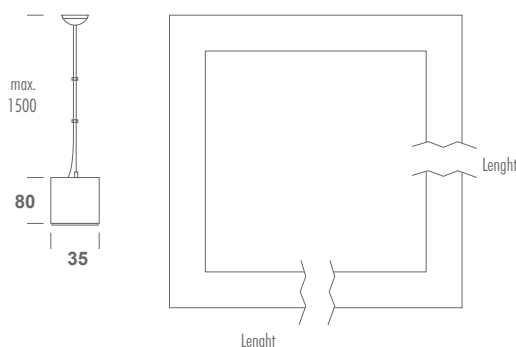

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX	XX	XX	N V P T D	3 4 6	XX