




LINEA FLEX SF

LED surface type
linear lighting fixture



Aluminum extruded body
Anodized coating
UV protected frosted diffuser
Adjustable length steel ropes
Nickel plated brass parts
Constant current LED driver
Electrostatic powder coating paint
Production in different lengths
Optional body colors
ENEC Standarts

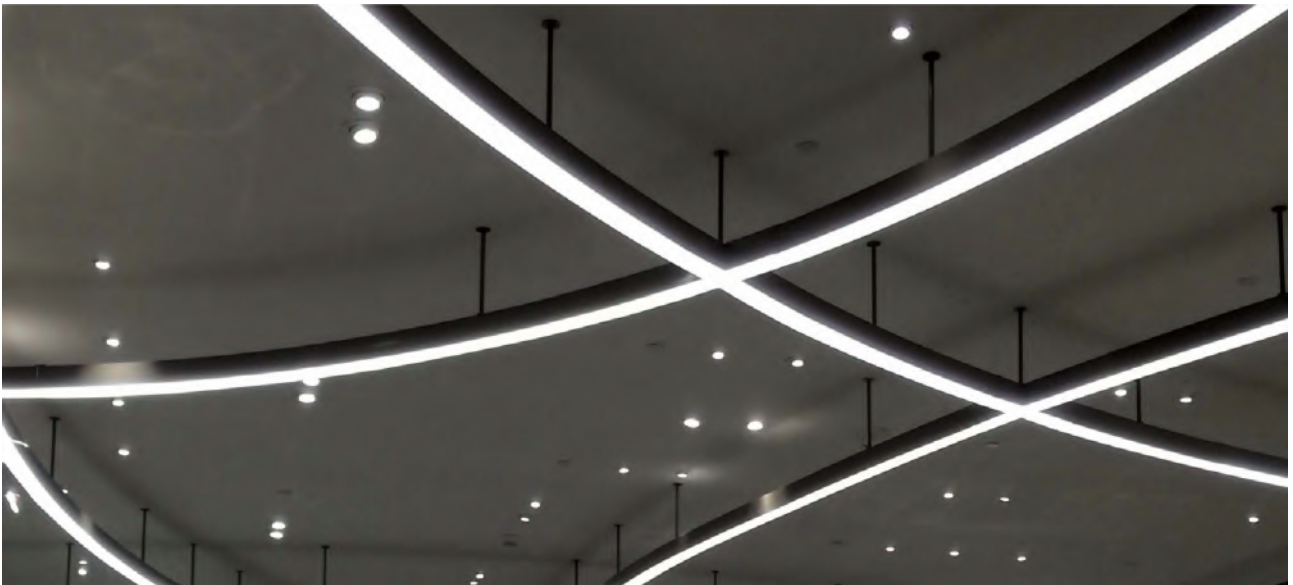

*"enjoy free design,
just imagine!"*

LINEA FLEX SF

LED surface type
linear lighting fixture



"enjoy free design,

just imagine!"

- Aluminum extruded body
- Anodized coating
- UV protected frosted diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC Standarts



PRODUCT CODE	W	Ø Length	Temp	Lumen*
LINEAFLEXSF.25.800.N.4.120	25	800	4000K	2750
LINEAFLEXSF.38.1155.N.4.120	38	1155	4000K	4180
LINEAFLEXSF.50.1500.N.4.120	50	1500	4000K	5560
LINEAFLEXSF.63.1890.N.4.120	63	1890	4000K	6930
LINEAFLEXSF.75.2255.N.4.120	75	2255	4000K	8250
LINEAFLEXSF.88.2610.N.4.120	88	2610	4000K	9870
LINEAFLEXSF.100.2950.N.4.120	100	2950	4000K	12315

* According to 4000K light temperature

BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz 5
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
▲	Light Beam 120°
●	White Satin Polycarbonate Diffuser
B	Black Body Color
°C	-20C°/+40C° Temperature


PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX XX XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	▲
XX XX XX	N	V	P	T	D	3	4	6	XX		

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Different Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN >90	CRI >90	○	W	E

TECHNICAL DRAWINGS





* For different options, please contact our team.

- Aluminum extruded body
- Anodized coating
- UV protected frosted diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC Standarts

"enjoy free design,
just imagine!"




on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz 5
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 120°
	White Satin Polycarbonate Diffuser
B	Black Body Color
°C	-20°C/+40°C Temperature


PRODUCT CODE	W	Ø Length	Temp	Lumen*
LINEAC.13.800.N.4.120	13	800	4000K	1430
LINEAC.19.1155.N.4.120	19	1155	4000K	2090
LINEAC.25.1500.N.4.120	25	1500	4000K	2750
LINEAC.31.1890.N.4.120	31	1890	4000K	3410
LINEAC.38.2255.N.4.120	38	2255	4000K	4180
LINEAC.44.2610.N.4.120	44	2610	4000K	4840
LINEAC.50.2950.N.4.120	50	2950	4000K	5500
LINEAC.56.3315.N.4.120	56	3315	4000K	6180
LINEAC.63.3675.N.4.120	63	3675	4000K	7000


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Different Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN >90	CRI >90		W	E

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	on/off	1-10V	PUSH TRIAC DALI	3K 4K 6.5K	
XX XX XX	N	V	P T D	3 4 6	XX



TECHNICAL DRAWINGS

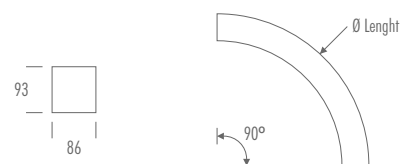

* For different options, please contact our team.

LINEA FLEX SF

LED surface type
linear lighting fixture



"enjoy free design,

just imagine!"

- Aluminum extruded body
- UV protected diffuser
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors



PRODUCT CODE	W	Ø Length	Temp	Lumen*
LINEACM.19.620.N.4.120	7	800	4000K	780
LINEACM.25.800.N.4.120	12	1500	4000K	1344
LINEACM.38.1155.N.4.120	19	2255	4000K	2128
LINEACM.50.1500.N.4.120	25	2950	4000K	2825
LINEACM.63.1890.N.4.120	32	3675	4000K	3590

* According to 4000K light temperature

BASIC OPTIONS

- on/off Control (No Dimmable) Input
- 230V AC Voltage 220-240V/AC - 50/60 Hz 5
- CRI >80 Color Rendering Index >80
- 4K Light Temperature 4000K
- Light Beam 120°
- White Satin Polycarbonate Diffuser
- B Black Body Color
- °C -20C°/+40C° Temperature



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Different Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN >90	CRI >90	W	E	

TECHNICAL DRAWINGS

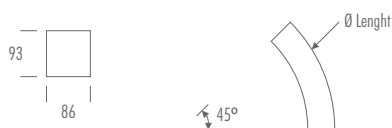



* For different options, please contact our team.

- Aluminum extruded body
- UV protected diffuser
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors

"enjoy free design,
just imagine!"




BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz 5
CRI > 80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 120°
	White Satin Polycarbonate Diffuser
B	Black Body Color
°C	-20C°/+40C° Temperature


PRODUCT CODE	W	Length	Temp	Lumen*
LINEAD.7.282.N.4.120	7	282	4000K	780
LINEAD.13.565.N.4.120	13	565	4000K	1456
LINEAD.19.845.N.4.120	19	845	4000K	2090
LINEAD.25.1125.N.4.120	25	1125	4000K	2770
LINEAD.31.1405.N.4.120	31	1405	4000K	3440
LINEAD.38.1685.N.4.120	38	1685	4000K	4190
LINEAD.44.1965.N.4.120	44	1965	4000K	4930
LINEAD.50.2254.N.4.120	50	2254	4000K	5660
LINEAD.56.2525.N.4.120	56	2525	4000K	6277
LINEAD.63.2810.N.4.120	63	2810	4000K	7056


* According to 4000K light temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Different Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN >90	CRI >90		W	E

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	
XX	XX	XX	N V P T D	3 4 6	XX



TECHNICAL DRAWINGS



* For different options, please contact our team.

LINEA FLEX SF

LED surface type
linear lighting fixture



"enjoy free design,
just imagine"!

- Aluminum extruded body
- UV protected diffuser
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors





PRODUCT CODE	Drawing No	W	Temp	Lumen*
LINEAE.12.326.N.4.120	1	12	4000K	1344
LINEAE.19.286.N.4.120	2	19	4000K	2128
LINEAE.19.573.N.4.120	3	19	4000K	2128
LINEAE.19.286.N.4.120	4	19	4000K	2128
LINEAE.25.603.N.4.120	5	25	4000K	2800
LINEAE.25.593.N.4.120	6	25	4000K	2800
LINEAE.25.573.N.4.120	7	25	4000K	2800

* According to 4000K light temperature

BASIC OPTIONS

- on/off on/off Control (No Dimmable) Input
- 230V AC Voltage 220-240V/AC - 50/60 Hz 5
- CRI >80 Color Rendering Index >80
- 4K Light Temperature 4000K
- Light Beam 120°
- White Satin Polycarbonate Diffuser
- B Black Body Color
- °C -20C°/+40C° Temperature

PRODUCT CODING

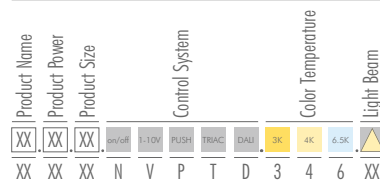

CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index >90
- Transparent Diffuser
- Different Body Color
- EMERGENCY KIT

* For different options, please contact our team.

TECHNICAL DRAWINGS

