



- Aluminum extruded body
- Anti-glare optical lens
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC standards




BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
Light Beam 50°, 80°	
Operating Temperature : -20 / 40 °C	
W	White Body Color

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Emergency KIT	Pendant or Surface Type
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	E	M

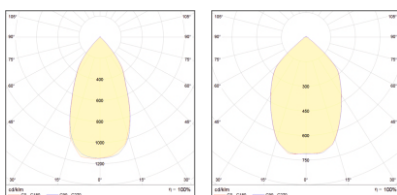

* For different options, please contact our team.

LED	IP20 INT	CRI > 80			60.000h L80	McAdam C3	CE	RoHS
-----	----------	----------	--	--	-------------	-----------	----	------

PRODUCT CODE	W	Lenght	Temp	Lumen*
LINERES.18.580.N.4.50	18	580	4000K	2200
LINERES.18.580.N.4.80	18	580	4000K	2170
LINERES.18.700.N.4.50	18	700	4000K	2200
LINERES.18.700.N.4.80	18	700	4000K	2170
LINERES.27.880.N.4.50	27	880	4000K	3350
LINERES.27.880.N.4.80	27	880	4000K	3320
LINERES.27.1000.N.4.50	27	1000	4000K	3350
LINERES.27.1000.N.4.80	27	1000	4000K	3320
LINERES.36.1160.N.4.50	36	1160	4000K	4600
LINERES.36.1160.N.4.80	36	1160	4000K	4570
LINERES.36.1300.N.4.50	36	1300	4000K	4600
LINERES.45.1300.N.4.80	36	1300	4000K	4570
LINERES.45.1500.N.4.50	45	1500	4000K	5380
LINERES.45.1500.N.4.80	45	1500	4000K	5350
LINERES.45.1700.N.4.50	45	1700	4000K	5380
LINERES.45.1700.N.4.80	45	1700	4000K	5350

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX	XX XX	XX XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX XX	XX XX	XX XX	N V P T D	3 4 6	XX

TECHNICAL DRAWINGS

