

LINERES D

pendant & surface type

linear lighting fixture

Aluminum extruded body
Anti-glare optical lens
UV protected diffuser
Adjustable length steel ropes
Nickel plated brass parts
Constant current LED driver
Electrostatic powder coating paint
Production in different lengths
Optional body colors
ENEC standards





PRODUCT CODE	W	Lenght	Temp	Lumen*
LINERES D.18.580.N.4.50-120	18	580	4000K	2160
LINERES D.18.580.N.4.80-120	18	580	4000K	2130
LINERES D.18.750.N.4.50-120	18	750	4000K	2160
LINERES D.18.750.N.4.80-120	18	750	4000K	2130
LINERES D.27.880.N.4.50-120	27	880	4000K	3240
LINERES D.27.880.N.4.80-120	27	880	4000K	3210
LINERES D.27.1100.N.4.50-120	27	1100	4000K	3240
LINERES D.27.1100.N.4.80-120	27	1100	4000K	3210
LINERES D.36.1160.N.4.50-120	36	1160	4000K	4320
LINERES D.36.1160.N.4.80-120	36	1160	4000K	4290
LINERES D.36.1350.N.4.50-120	36	1350	4000K	4320
LINERES D.36.1350.N.4.80-120	36	1350	4000K	4290
LINERES D.45.1300.N.4.50-120	45	1300	4000K	4830
LINERES D.45.1300.N.4.80-120	45	1300	4000K	4800
LINERES D.45.1600.N.4.50-120	45	1600	4000K	4830
LINERES D.45.1600.N.4.80-120	45	1600	4000K	4800

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX	XX	XX	N V P T D	3 4 6	XX

TECHNICAL DRAWINGS


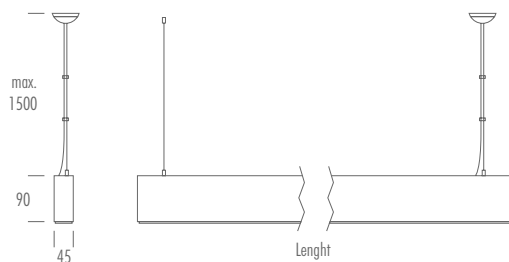


BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI >80	Color Rendering Index > 80
4K	Light Temperature 4000K
50° - 120°	Light Beam 50° - 120°
Operating Temperature : -20 / 40 °C	
W	White Body Color

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Emergency KIT	Pendant or Surface Type
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	E	M



* For different options, please contact our team.