

LOOP P80

LED pendant type

Circular LED lighting fixture



Aluminum extruded body
Anodized coating
UV protected frosted diffuser
Adjustable length steel ropes
Nickel plated brass parts
Constant current LED driver
Electrostatic powder coating paint
Production in different lengths
Optional body colors
ENEC Standards



LED	230V	IP20 INT	CRI >80			60.000h L80	McAdam C3	CE	
-----	------	-------------	------------	--	--	----------------	--------------	----	--

PRODUCT CODE	W	Lenght	Temp	Lumen *
LOOPP80.30.400.N.4.120	30	400	4000K	2550
LOOPP80.45.600.N.4.120	45	600	4000K	3825
LOOPP80.60.800.N.4.120	60	800	4000K	5100
LOOPP8075.1000.N.4.120	75	1000	4000K	6375
LOOPP80.90.1200.N.4.120	90	1200	4000K	7650

* According to 4000K light temperature


BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz 5
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 120°
	White Satin Polycarbonate Diffuser
B	Black Body Color
°C	-20C°/+40C° Temperature

PRODUCT CODING


Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	
XX	XX	XX	N V P T D	3 4 6	XX

TECHNICAL DRAWINGS

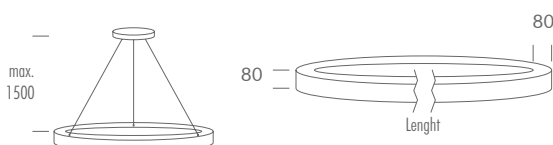

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Different Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90		W	E



* For different options, please contact our team.