

MINI

Outdoor type
LED Bollard Lighting



Functionality, energy saving and minimalist style are the features of the new stalks and MINI posts, a polyfunctional collection for urban Bollard that adapts to environments classical and contemporary.

MINI is characterized by a circular base, surmounted by a large aluminum disc housing a circular LED matrix. This outdoor lighting solution is available in different lengths, diffusing a soft and pleasant light around the MINlire. This model is available in aluminum gray or in the typical black color.

Characteristics

Aluminium body
E27 LED Bulb
PMMA acrylic light diffuser
Electrostatic powder paint
High quality silicon gasket
Anchor system
Optional body colors
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

Key Advantages

- Simple for modern designs.
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications




Landscape



Outdoor



Urban




Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	> 82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C


Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	> 90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years
Diffuser	Transparent or Opaque


Light Colors



Body Colors Options

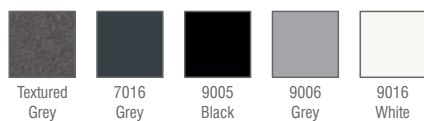

Light Effect



Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
MINI.8.600.AC.N.4.SYM.7016	8W	4000K	600mm	1056
MINI.10.600.AC.N.4.SYM.7016	10W	4000K	600mm	1320
MINI.15.800.AC.N.4.SYM.7016	15W	4000K	800mm	1980
MINI.20.800.AC.N.4.SYM.7016	20W	4000K	800mm	2640
MINI.25.1000.AC.N.4.SYM.7016	25W	4000K	1000mm	3300
MINI.30.1000.AC.N.4.SYM.7016	30W	4000K	1000mm	3960
MINI.25.1500.AC.N.4.SYM.7016	25W	4000K	1500mm	3300
MINI.30.1500.AC.N.4.SYM.7016	30W	4000K	1500mm	3960
MINI.35.2000.AC.N.4.SYM.7016	35W	4000K	2000mm	4620
MINI.40.2000.AC.N.4.SYM.7016	40W	4000K	2000mm	5280



Optional Accessories



IP67
Junction
Box

Product Coding

Product Name	Product Power	Input		Control System					Color Temperature			Light Beam	Body Color
XX	XX	AC	DC	on/off	1-10V	PUSH	TRAC	DALI	3K	4K	6.5K		XX
XX	XX	AC	DC	N	V	P	T	D	3	4	6	XX	XX