



NAIK MAG

magnetic type
Pendant Lighting

- Aluminium body
- Aluminium extrusion heatsink
- Nickel plated brass parts
- Electrostatic powder coating paint
- High performance COB LED
- High efficiency reflector
- Optional body colors
- ENEC standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 24V - 48V DC
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
▲	Light Beam 15°, 30°, 45°
🌡️	Operating Temperature : -20 / +40 °C
B	White Body Color

PRODUCT CODE	W	Lenght	Temp	Lumen*
NAIK MAG35.5.250.N.4.30	5	250	4000K	550
NAIK MAG35. 10.250.N.4.30	10	250	4000K	1100
NAIK MAG50. 10.250.N.4.30	10	250	4000K	1100
NAIK MAG50. 15.250.N.4.30	15	250	4000K	1650


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 2700K	Light Temperature 3000K	Light Temperature 4000K	Light Temperature 5000K	Dynamic White	Color Rendering Index > 90	Optional Body Color
1-10V	PUSH	TRIAC	DALI	24V DC	2.7K	3K	4K	5K	DYN	CRI >90	W

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature				Light Beam
XX	XX	XX	N	V	P	T	D	2	3	4	5	XX



TECHNICAL DRAWINGS

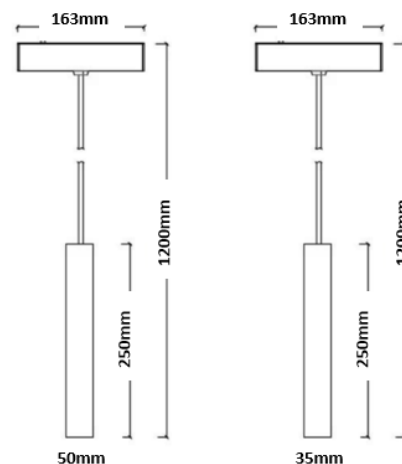

* For different options, please contact our team.