



Aluminum injection body
High efficiency reflector
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC Standards
ENEC Standards
IP44 - IP65


LED	230V	IP44 IP65	CRI >80			60.000h L80	McAdam C3	CE	
-----	------	--------------	------------	--	--	----------------	--------------	----	--

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index > 80
4K	Light Temperature 4000K
	Light Beam 16°, 24°, 46°, 74°
w	White Body Color

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

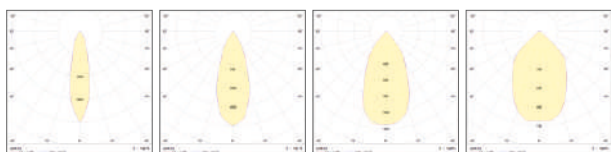

* For different options, please contact our team.

PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
OMGXL.20.0190.N.4.16	20	160	Ø190	Ø165	4000K	2300
OMGXL.20.0190.N.4.24	20	160	Ø190	Ø165	4000K	2280
OMGXL.20.0190.N.4.46	20	160	Ø190	Ø165	4000K	2260
OMGXL.20.0190.N.4.74	20	160	Ø190	Ø165	4000K	2240
OMGXL.30.0190.N.4.16	30	160	Ø190	Ø165	4000K	3600
CNCR.30.0190.N.4.24	30	160	Ø190	Ø165	4000K	3580
OMGXL.30.0190.N.4.46	30	160	Ø190	Ø165	4000K	3560
OMGXL.30.0190.N.4.74	30	160	Ø190	Ø165	4000K	3540
OMGXL.42.0190.N.4.16	42	160	Ø190	Ø165	4000K	5000
OMGXL.42.0190.N.4.24	42	160	Ø190	Ø165	4000K	4980
OMGXL.42.0190.N.4.46	42	160	Ø190	Ø165	4000K	4960
OMGXL.42.0190.N.4.74	42	160	Ø190	Ø165	4000K	4940
OMG.55.0190.N.4.16	55	160	Ø190	Ø165	4000K	6600
OMGXL.55.0190.N.4.24	55	160	Ø190	Ø165	4000K	6580
OMGXL.55.0190.N.4.46	55	160	Ø190	Ø165	4000K	6560
OMGXL.55.0190.N.4.74	55	160	Ø190	Ø165	4000K	6540

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX	XX	1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX XX XX	N	V	P T D	3 4 6	XX

TECHNICAL DRAWINGS

