

Orbit DuoAdjustable

recessed type
downlight



Aluminum injection body and heatsink
Constant current LED driver
Electrostatic powder coating paint
Tempered glass
Optional body colors
ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
Light Beam 16°, 24°, 46°, 74°	
w	White Body Color

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
ORBT2.40.0348.N.4.16	40	110	0348	Ø158x2	4000K	4600
ORBT2.40.0348.N.4.24	40	110	0348	Ø158x2	4000K	4580
ORBT2.40.0348.N.4.46	40	110	0348	Ø158x2	4000K	4560
ORBT2.40.0348.N.4.74	40	110	0348	Ø158x2	4000K	4540
ORBT2.60.0348.N.4.16	60	110	0348	Ø158x2	4000K	7300
ORBT2.60.0348.N.4.24	60	110	0348	Ø158x2	4000K	7280
ORBT2.60.0348.N.4.46	60	110	0348	Ø158x2	4000K	7260
ORBT2.60.0348.N.4.74	60	110	0348	Ø158x2	4000K	7240
ORBT2.84.0348.N.4.16	84	110	0348	Ø158x2	4000K	10000
ORBT2.84.0348.N.4.24	84	110	0348	Ø158x2	4000K	9980
ORBT2.84.0348.N.4.46	84	110	0348	Ø158x2	4000K	9960
ORBT2.84.0348.N.4.74	84	110	0348	Ø158x2	4000K	9940


CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	G

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX XX XX	XX XX XX	PUSH TRIAC DALI	3K 4K 6.5K	XX
XX XX XX	N	V	P T D	3 4 6	XX

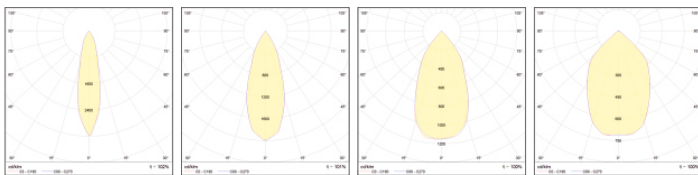

* For different options, please contact our team.

TECHNICAL DRAWINGS

