

# PARK

Outdoor type  
LED Bollard Lighting



**A simple and structural accent for modern exteriors. Park Outdoor LED bollard provides soft atmospheric lighting to accentuate outdoor spaces and offer guidance along pathways.**

Made of aluminum, this cylindrical fixture extends straight upward to allow its light to spill outward. This bollard is an iconic gothic design in a modern reinterpretation to LED sources with outstanding performance, designed to guarantee an high visual comfort, glare-free lighting with no light pollution.

## Key Advantages


- Simple and structural for modern designs
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

## Characteristics

Aluminium body
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

## Applications



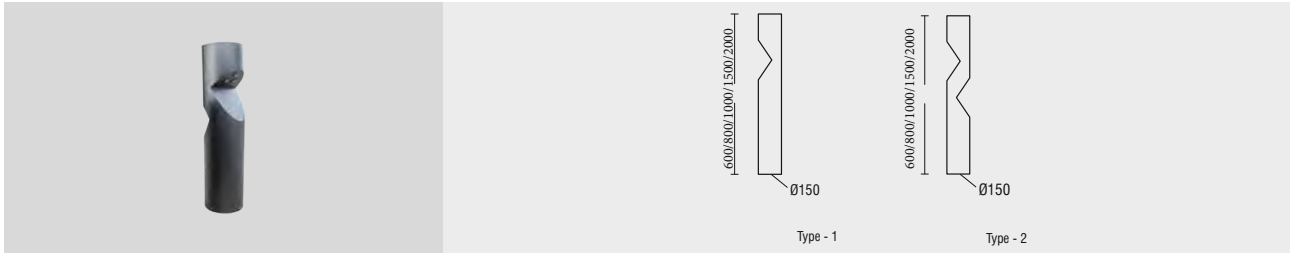


## Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C


## Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years


## Light Colors



## Body Colors Options

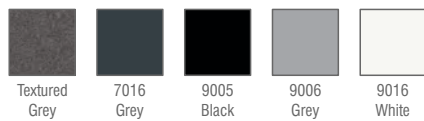

## Beam Angle Options

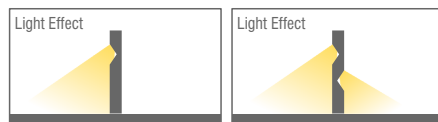

## Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
PARK.8.600.AC.N.4.SYM.7016	8W	4000K	600mm	1056
PARK.10.600.AC.N.4.SYM.7016	10W	4000K	600mm	1320
PARK.15.800.AC.N.4.SYM.7016	15W	4000K	800mm	1980
PARK.20.800.AC.N.4.SYM.7016	20W	4000K	800mm	2640
PARK.25.1000.AC.N.4.SYM.7016	25W	4000K	1000mm	3300
PARK.30.1000.AC.N.4.SYM.7016	30W	4000K	1000mm	3960
PARK.25.1500.AC.N.4.SYM.7016	25W	4000K	1500mm	3300
PARK.30.1500.AC.N.4.SYM.7016	30W	4000K	1500mm	3960
PARK.35.2000.AC.N.4.SYM.7016	35W	4000K	2000mm	4620
PARK.40.2000.AC.N.4.SYM.7016	40W	4000K	2000mm	5280



## Optional Accessories



IP67  
Junction  
Box

## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX