

POLARIS SQ SURFACE

LED Surface type

Square lighting fixture



- Aluminum extruded body
- Anodized coating
- UV protected frosted diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC Standarts



PRODUCT CODE	w	Lenght	Temp	Lumen*
POLARISSQ.25.485.N.4.120	25	485	4000K	2625
POLARISSQ.38.620.N.4.120	38	620	4000K	3990
POLARISSQ.80.920.N.4.120	80	920	4000K	8400
POLARISSQ.143.1220.N.4.120	143	1220	4000K	15015

* According to 4000K light temperature

BASIC OPTIONS

- on/off on/off Control (No Dimmable) Input
- 230V AC Voltage 220-240V/AC - 50/60 Hz 5
- CRI >80 Color Rendering Index >80
- 4K Light Temperature 4000K
- Light Beam 120°
- White Satin Polycarbonate Diffuser
- B Black Body Color
- °C -20C°/+40C° Temperature



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Differemt Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	W	E	

TECHNICAL DRAWINGS

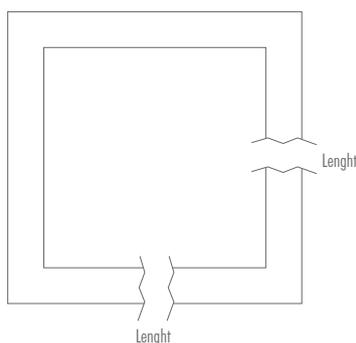

* For different options, please contact our team.