



SATIN LINE SLIM R

LED Linear Strip

Recessed mounted ledbar fixture

Aluminum extruded body

UV protected High homogenous light diffusion
with high-quality diffuser Aluminum
mounting brackets

Production in different lengths Daisy-
chain connection topology up to 10 meters

IP67 I/O Connectors

ENEC Standarts



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
24V DC	Input Voltage 24V DC
CRI >80	Color Rendering Index >80
Temp	Light Temperature 2700K, 3000K, 4000K, 5000K, 6500K
Light Beam	Light Beam 120°
White OPAL Polycarbonate Diffuser	
°C	-20°C/+60°C Temperature
R-G-B	Amber, Red, Green or Blue Mono Color

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	RGB PWM SIGNAL WITH RC	Light Color RGBW	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	PMW	RGBW	DYN	CRI >90	○	E

Optional Accessories




IP CONNECTOR

PRODUCT CODE	W/M	Color	Length	LUMEN
SATINLINESLIM.14.100.4.120	14W	4000K	600MM	1420

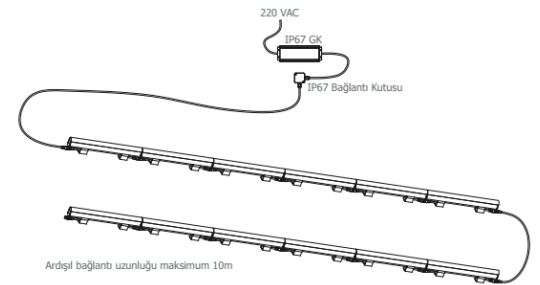

TECHNICAL DRAWINGS

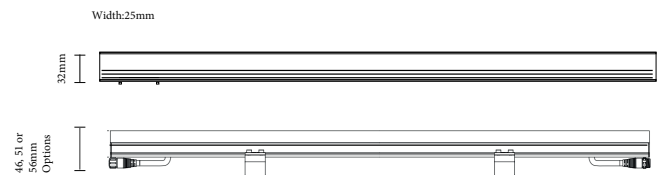

* For different options, please contact our team.