

SNAIL ADJUSTABLE

recessed type downlight



Aluminium injection body

Single Removable


High efficiency reflector current

LED driver

Electrostatic powder coating paint

Optional body colors

ENEC standards



BASIC OPTIONS

ON/ OFF	ON/OFF
230V AC	Color Rendering Index
CRI >80	>80 Light Temperature
4K	4000K
Light Beam 46°	
W	White Body Color


PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
SNAIL.8W.160.N.4.46	8	133	Ø160	Ø145	4000K	880
SNAIL.10W.160.N.4.46	10	133	Ø160	Ø145	4000K	1100
SNAIL.13W.160.N.4.46	13	133	Ø160	Ø145	4000K	1430
SNAIL.20W.160.N.4.46	20	133	Ø160	Ø145	4000K	2200
SNAIL.30W.160.N.4.46	30	133	Ø160	Ø145	4000K	3300
SNAIL.35W.160.N.4.46	35	133	Ø160	Ø145	4000K	3850
SNAIL.42W.160.N.4.46	42	133	Ø160	Ø145	4000K	4620

*According to 4000K light temperature


CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Optional Body Color	Optional Reflector Color	Emergency KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	R	E

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX XX XX	XX XX XX	PUSH TRIAC DALI	3K 4K 6.5K	XX

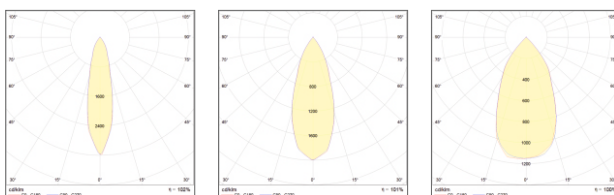

TECHNICAL DRAWINGS

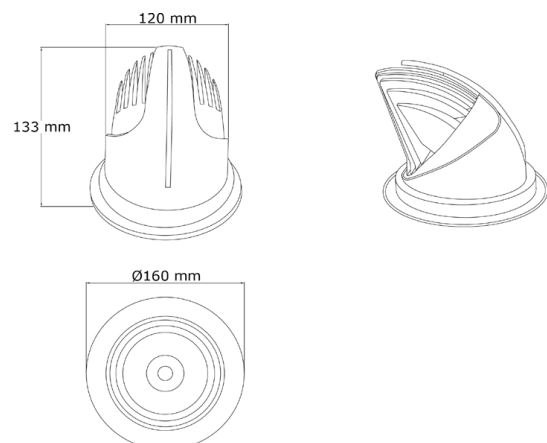

* For different options, please contact our team.