


STELLA

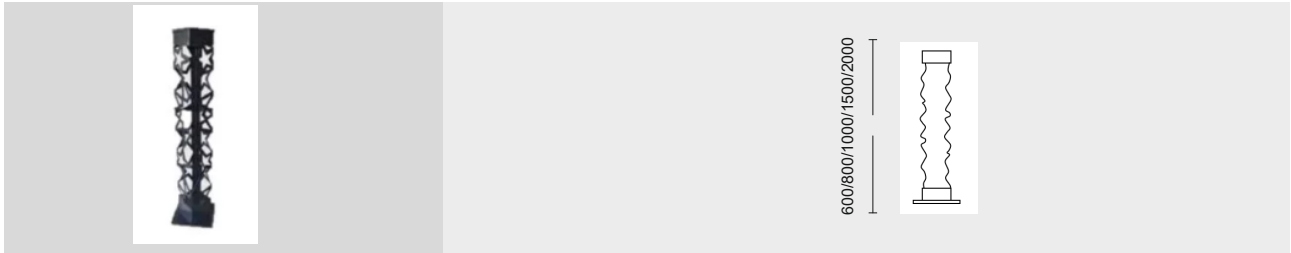


Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C
Diffuser	Acrylic


Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years
Diffuser	Transparent or Opaque


Light Colors



Body Colors Options

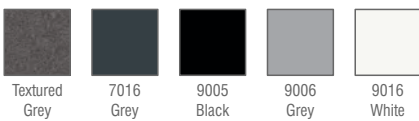

Light Effect



Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
STELLA.8.600.AC.N.4.SYM.7016	8W	4000K	600mm	1056
STELLA.10.600.AC.N.4.SYM.7016	10W	4000K	600mm	1320
STELLA.15.800.AC.N.4.SYM.7016	15W	4000K	800mm	1980
STELLA.20.800.AC.N.4.SYM.7016	20W	4000K	800mm	2640
STELLA.25.1000.AC.N.4.SYM.7016	25W	4000K	1000mm	3300
STELLA.30.1000.AC.N.4.SYM.7016	30W	4000K	1000mm	3960
STELLA.25.1500.AC.N.4.SYM.7016	25W	4000K	1500mm	3300
STELLA.30.1500.AC.N.4.SYM.7016	30W	4000K	1500mm	3960
STELLA.35.2000.AC.N.4.SYM.7016	35W	4000K	2000mm	4620
STELLA.40.2000.AC.N.4.SYM.7016	40W	4000K	2000mm	5280



Optional Accessories



IP67
Junction
Box

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX