

SURFACE SYSTEM

magnetic type

Linear lighting fixture



Aluminum extruded body
UV protected diffuser
Nickel plated brass parts
Electrostatic powder coating paint
Production in different lengths
Optional body colors
ENEC standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
	Light Beam 120° Opaque
	Operating Temperature : -20 / 40 °C
B	Grey Body Color

PRODUCT CODE	W	Lenght	Temp	Lumen*
SURFACE.SYSTEM.5.137.N.4.120	5	137	4000K	550
SURFACE.SYSTEM.10.137.N.4.120	10	137	4000K	1120
SURFACE.SYSTEM.10.270.N.4.120	10	270	4000K	1200
SURFACE.SYSTEM.20.270.N.4.120	20	270	4000K	2110
SURFACE.SYSTEM.15.405.N.4.120	15	405	4000K	1540
SURFACE.SYSTEM.30.405.N.4.120	30	410	4000K	3200

* According to 4000K light temperature



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 2700K	Light Temperature 3000K	Light Temperature 4000K	Light Temperature 5000K	Dynamic White	Color Rendering Index > 90	Optional Body Color
1-10V	PUSH	TRIAC	DALI	24V DC	2.7K	3K	4K	5K	DYN	CRI > 90	W

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX	XX XX	XX XX	on/off 1-10V PUSH TRIAC DALI	2 3 4 5	XX

TECHNICAL DRAWINGS

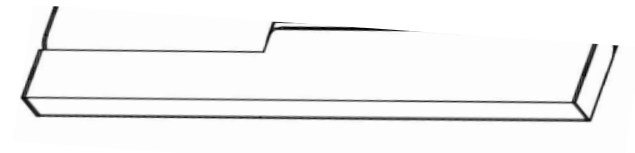

* For different options, please contact our team.