


URAN

track type
spotlight

- Aluminum injection body
- High efficiency reflector
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC standards

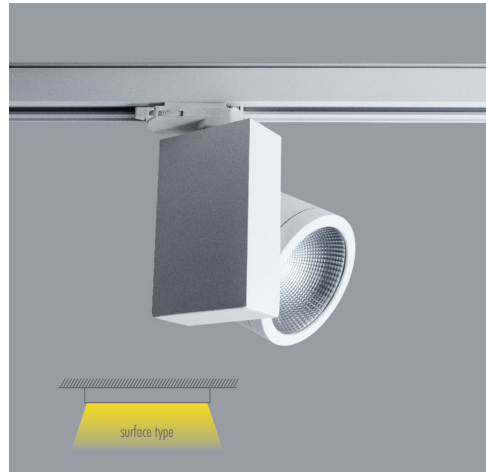

PRODUCT CODE	W	Height	Length	Temp	Lumen*
URAN.20.112.N.4.28	20	163	Ø112	4000K	2540
URAN.20.112.N.4.40	20	163	Ø112	4000K	2510
URAN.20.112.N.4.74	20	163	Ø112	4000K	2490
URAN.30.112.N.4.28	30	163	Ø112	4000K	3900
URAN.30.112.N.4.40	30	163	Ø112	4000K	3870
URAN.30.112.N.4.74	30	163	Ø112	4000K	3840
URAN.35.112.N.4.28	35	163	Ø112	4000K	4800
URAN.35.112.N.4.40	35	163	Ø112	4000K	4770
URAN.35.112.N.4.74	35	163	Ø112	4000K	4740

* According to 4000K light temperature

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI >80	Color Rendering Index > 80
4K	Light Temperature 4000K
▲	Light Beam 28°, 40°, 74°
🌡️	Operating Temperature : -20 / 40 °C
w	White Body Color



PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	▲
XX	XX	XX	N	V	P	T	D	3	4	6	XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Emergency KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	E

TECHNICAL DRAWINGS

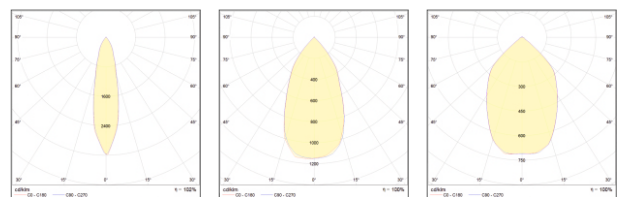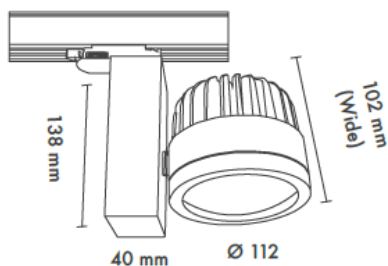

* For different options, please contact our team.