





Aluminium injection body
High efficiency reflector
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC standards



BASIC OPTIONS


on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
▲	Light Beam 16°, 24°, 46°, 74°
🌡️	Operating Temperature : -20 / 40 °C
W	White Body Color

PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
SATEEN.20.190x190.N.4.16	20	115	190x190	165x165	4000K	2500
SATEEN.20.190x190.N.4.24	20	115	190x190	165x165	4000K	2470
SATEEN.20.190x190.N.4.46	20	115	190x190	165x165	4000K	2440
SATEEN.20.190x190.N.4.74	20	115	190x190	165x165	4000K	2410
SATEEN.30.190x190.N.4.16	30	115	190x190	165x165	4000K	4000
SATEEN.30.190x190.N.4.24	30	115	190x190	165x165	4000K	3970
SATEEN.30.190x190.N.4.46	30	115	190x190	165x165	4000K	3940
SATEEN.30.190x190.N.4.74	30	115	190x190	165x165	4000K	3910
SATEEN.42.190x190.N.4.16	42	115	190x190	165x165	4000K	5500
SATEEN.42.190x190.N.4.24	42	115	190x190	165x165	4000K	5470
SATEEN.42.190x190.N.4.46	42	115	190x190	165x165	4000K	5440
SATEEN.42.190x190.N.4.74	42	115	190x190	165x165	4000K	5410

* According to 4000K light temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Optional Reflector Color	Emergency KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	R	E

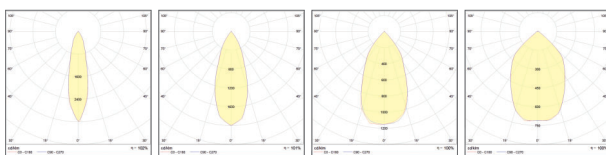

* For different options, please contact our team.

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX XX XX	XX	XX	PUSH	1-10V	TRIAC	DALI		3K	4K	6.5K	XX
XX XX XX	N	V	P	T	D			3	4	6	XX

TECHNICAL DRAWINGS

