





AURA FLUT 100

pendant & surface type

linear lighting fixture



- Aluminum extruded body
- UV protected diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
Light Beam 120°	
Operating Temperature : -20 / 40 °C	
G	Black Body Color

PRODUCT CODE

	W	Lenght	Temp	Lumen*
AURA FLUT100.85.18.500.N.4.120	18	500	4000K	2196
AURA FLUT100.85.30.1000.N.4.120	30	1000	4000K	3660
AURA FLUT100.85.36.1200.N.4.120	36	1200	4000K	4392
AURA FLUT100.85.45.1500.N.4.120	54	1500	4000K	6588

* According to 4000K light temperature



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Emergency KIT	Pendant or Surface Type
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	E	M

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX	XX XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX	XX	XX	N V P T D	3 4 6	XX

TECHNICAL DRAWINGS

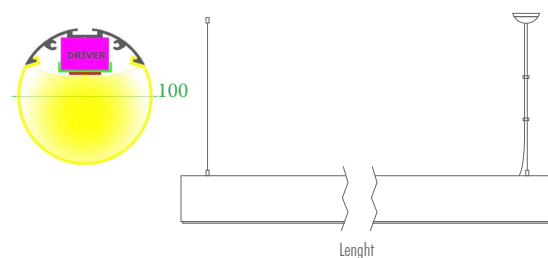

* For different options, please contact our team.