

TECH ROUND LED

Surface Mounted Wall Luminaire



Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut at metus sed tortor viverra tempor sed fringilla nulla. Suspendisse tempus nec justo eget sodales. Donec ac euismod augue. Nullam faucibus, neque at cursus porta, lacus orci lobortis velit, eu ornare purus turpis lacinia libero.

Etiam bibendum iaculis lacus vitae sodales. Suspendisse at eros volutpat, ornare tellus fringilla, sagittis turpis. In egestas sem et eros mattis lobortis. Maecenas aliquet eros nunc, non placerat nibh porta a. Nam vehicula, libero at ullamcorper iaculis, dolor nunc consequat nisl, a consectetur diam enim id purus. Donec venenat

Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

Extra Clear 5mm Tempered Glass

Aluminium PCB

LED with Life Span >60.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

Key Advantages

- High operational temperature
- Can be easily integrated to many designs
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- High lumen output



Exterior



Facade




Architectural



Ancient


TECH ROUND LED




Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
CRI	>80
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,90
Weight	0,80 - 1.20 kg
Ambient Temperature	-30°C / +60°C


Light Colors



Body Colors Options



Beam Angle Options

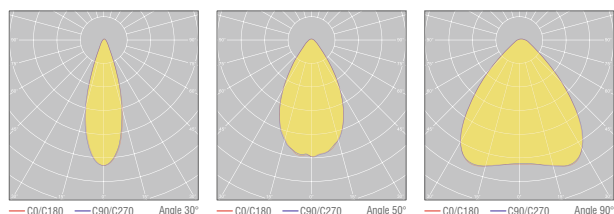

Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	30°, 60°, 90°
Light Color	3000K, 4000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years

Ordering Details-Single way

Product Code	Power	Light Color	Lumen
TECH ROUND.1.AC.N.3.30.7016	3W	3000K	280
TECH ROUND.1.AC.N.4.30.7016	4W	4000K	388
TECH ROUND.1.AC.N.6.30.7016	6W	6500K	590
TECH ROUND.1.AC.N.3.30.7016	12W	3000K	1132
TECH ROUND.1.AC.N.4.30.7016	12W	4000K	1138
TECH ROUND.1.AC.N.6.30.7016	12W	6500K	1200

Ordering Details-Double way

TECH ROUND.1.AC.N.4.2.30.7016	2x1W	4000K	1440x2
TECH ROUND.1.AC.N.2.30.7016	2x2W	6500K	1500x2

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX