TECH SQUARE LED

Surface Mounted Wall Luminaire

IP65

IK09

Made in Turkey

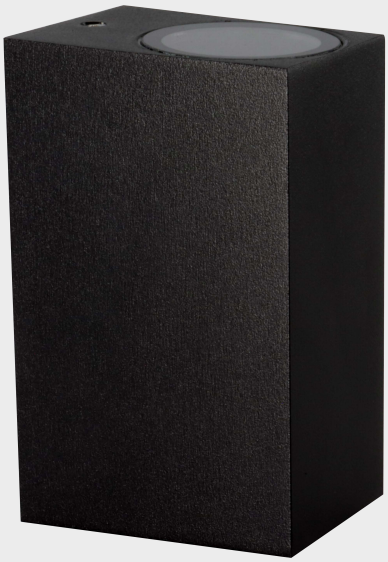

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut at metus sed tortor viverra tempor sed fringilla nulla. Suspendisse tempus nec justo eget sodales. Donec ac euismod augue. Nullam faucibus, neque at cursus porta, lacus orci lobortis velit, eu ornare purus turpis lacinia libero.

Etiam bibendum iaculis lacus vitae sodales. Suspendisse at eros volutpat, ornare tellus fringilla, sagittis turpis. In egestas sem et eros mattis lobortis. Maecenas aliquet eros nunc, non placerat nibh porta a. Nam vehicula, libero at ullamcorper iaculis, dolor nunc consequat nisl, a consectetur diam enim id purus. Donec venenat

Key Advantages

- High operational temperature
- Can be easily integrated to many designs
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- High lumen output

Characteristics
Aluminium Injection Body
Electrostatic Powder Paint
Optional RAL Colors
Extra Clear 5mm Tempered Glass
Aluminium PCB
LED with Life Span >60.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)

Exterior Facade Architectural Ancient

TECH SQUARE LED



Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
CRI	>80
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,90
Weight	0,80 - 1.20 kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	30°, 60°, 90°
Light Color	3000K, 4000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years

Light Colors

Body Colors Options

Ordering Details-Single way

Product Code	Power	Light Color	Lumen
TECH SQUARE.1.AC.N.3.30.7016	3W	3000K	280
TECH SQUARE.1.AC.N.4.30.7016	4W	4000K	388
TECH SQUARE.1.AC.N.6.30.7016	6W	6500K	590
TECH SQUARE.1.AC.N.3.30.7016	12W	3000K	1132
TECH SQUARE.1.AC.N.4.30.7016	12W	4000K	1138
TECH SQUARE.1.AC.N.6.30.7016	12W	6500K	1200

Ordering Details-Double way

TECH SQUARE.1.AC.N.4.2.30.7016	2X1W	4000K	1440x2
TECH SQUARE.1.AC.N.2.30.7016	2x2W	6500K	1500x2

Beam Angle Options

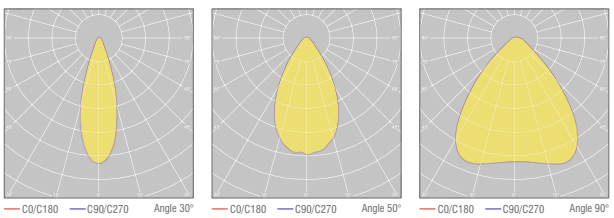
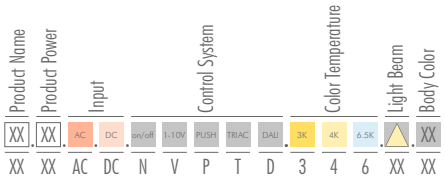
Product Coding