



CESAR SS RGB

Linear LED Wallwasher
Surface Mounted Facade Lighting

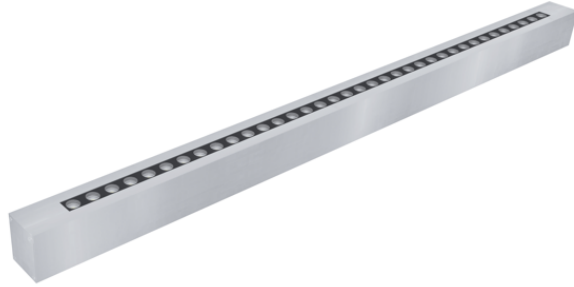

Cesar SS exterior wallwasher luminaire is mainly used wall washing, spot lighting and flood lighting. Continuous interconnection with IP68 connectors. Mounting bracket made of stainless steel.

316 L Stainless steel body with stainless end caps offering various installation types. It is available as dimming options and many customizations options.

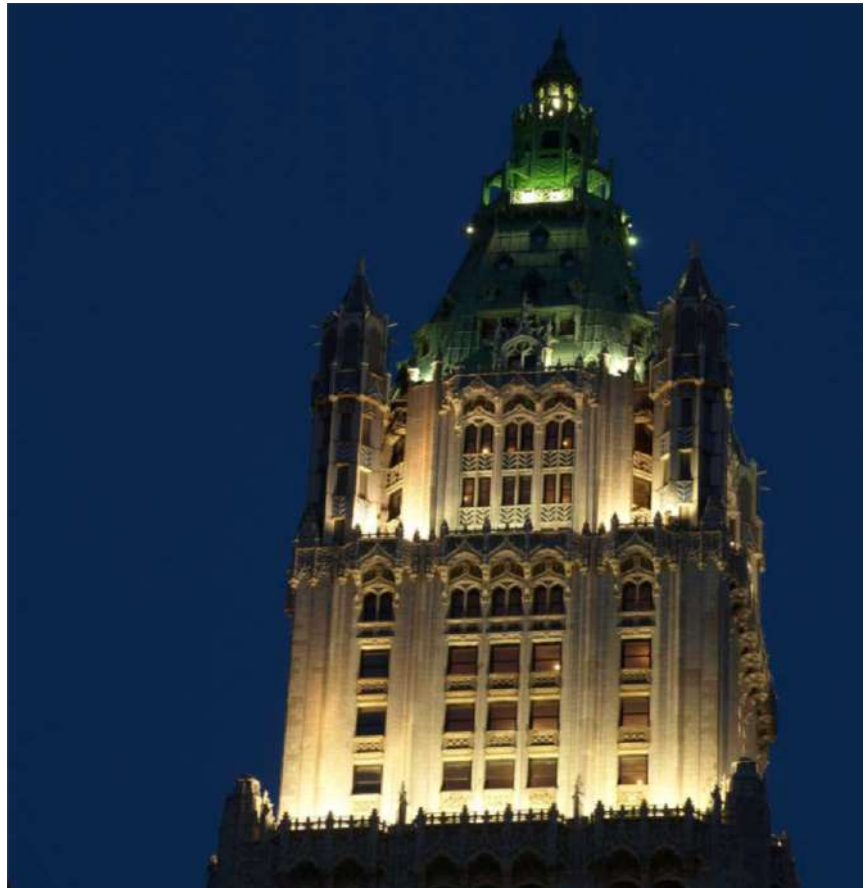

CESAR SS RGB

Linear LED Wallwasher
Surface Mounted Facade Lighting

Basic Options

Light Source	High Power LED
Light Source Color	RGB
Control Interface	DMX
Protection Class IEC	Class 1
CE Mark	Yes
ENEC Standards	Yes
Warranty Period	5 years
L 70	> 60 000 Hours
MacAdams	3 Step MacAdams
Wind Catching Area	0.13m ²
Power Factor(Min)	0.95
Ambient Temperature	-25°C to +60°C
CRI	>80

Electrical Options

Input Voltage	100 - 305V/AC
Input Frequency	50-60Hz
Number of Gear Unit	1 Unit
Power Unit	Power Supply
Surge Protection	6 KV
Electrical Protection Class	Class I

Body Options

Housing	316 Stainless Steel
Glass	Tempered Glass
Gasket	Silicone
Protection Rating	IP68
Impact Resistance	IK09
Color	Grey
Dimensions (LxWxH)	320-1520x50x60
Screws	316 Stainless Steel
End Caps	316 Stainless Steel

Optics


Light Distribution	30°/60°/90°/120°/Asm
--------------------	----------------------

Connection

Connection Cable	5 pins circular
------------------	-----------------

Customized Options

Power	8W - 57W ± %5
Led Qty	8 / 16 / 24 / 36 / 40
Input Voltage	24V/DC (Optional)
CRI	>90 (Optional)
Light Color	RGB

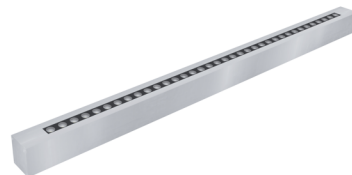

CESAR SS RGB

Linear LED Wallwasher
Surface Mounted Facade Lighting


Ordering Details

Product Code	Input	Power	Light Color	Lenght	Control
CesarSS.8.328.D.RGB.XX	220V/AC	8W	RGB	328mm	DMX
CesarSS.12.328.D.RGB.XX	220V/AC	12W	RGB	328mm	DMX
CesarSS.16.628.D.RGB.XX	220V/AC	16W	RGB	628mm	DMX
CesarSS.24.628.D.RGB.XX	220V/AC	24W	RGB	628mm	DMX
CesarSS.27.1000.D.RGB.XX	220V/AC	27W	RGB	1000mm	DMX
CesarSS.48.1000.D.RGB.XX	220V/AC	48W	RGB	1000mm	DMX
CesarSS.36.1228.D.RGB.XX	220V/AC	36W	RGB	1228mm	DMX
CesarSS.54.1228.D.RGB.XX	220V/AC	54W	RGB	1228mm	DMX
CesarSS.40.1520.D.RGB.XX	220V/AC	40W	RGB	1520mm	DMX
CesarSS.54.1520.D.RGB.XX	220V/AC	54W	RGB	1520mm	DMX

Product Coding

Product Name	Product Power	Product Size	Control System	Color	Light Beam
XX	XX	XX	DMX	RGB	XX
XX	XX	XX	D	RGBW	XX

Technical Drawing

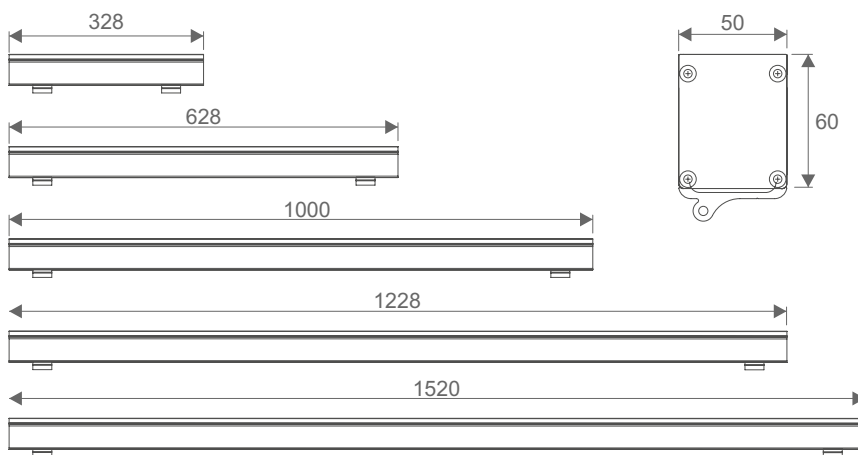

Connection Diagram

