

# TECH ROUND V2 LED

Surface Mounted Wall Luminaire



**Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut at metus sed tortor viverra tempor sed fringilla nulla. Suspendisse tempus nec justo eget sodales. Donec ac euismod augue. Nullam faucibus, neque at cursus porta, lacus orci lobortis velit, eu ornare purus turpis lacinia libero.**

Etiam bibendum iaculis lacus vitae sodales. Suspendisse at eros volutpat, ornare tellus fringilla, sagittis turpis. In egestas sem et eros mattis lobortis. Maecenas aliquet eros nunc, non placerat nibh porta a. Nam vehicula, libero at ullamcorper iaculis, dolor nunc consequat nisl, a consectetur diam enim id purus. Donec venenat

## Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

Extra Clear 5mm Tempered Glass

Aluminium PCB

LED with Life Span >60.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

## Key Advantages

- High operational temperature
- Can be easily integrated to many designs
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- High lumen output



Exterior



Facade




Architectural



Ancient

# TECH ROUND V2 LED

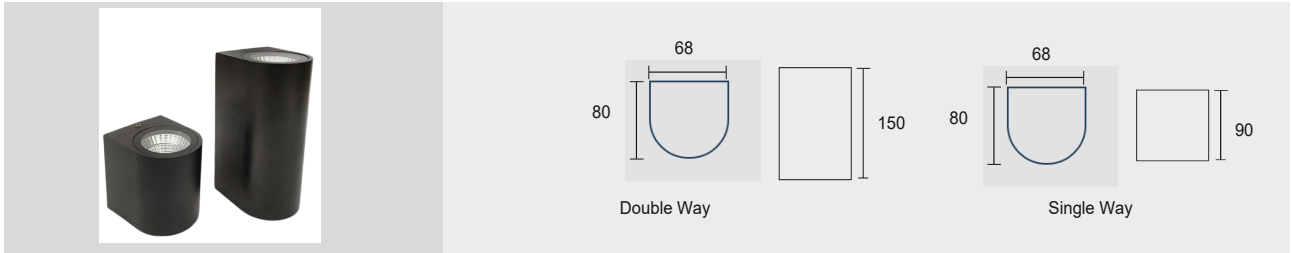


## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
CRI	>80
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,90
Weight	0,80 - 1.20 kg
Ambient Temperature	-30°C / +60°C


## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	30°, 60°, 90°
Light Color	3000K, 4000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years


## Light Colors



## Body Colors Options

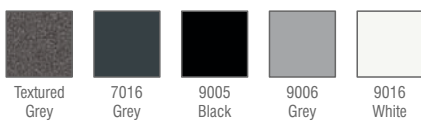

## Beam Angle Options

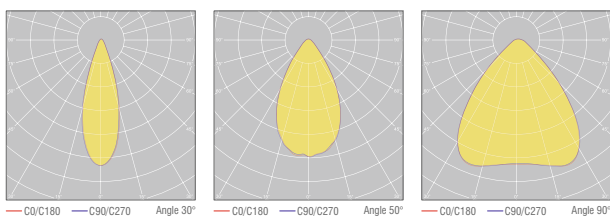

## Ordering Details-Single way

Product Code	Power	Light Color	Lumen
TECH ROUND.V2.AC.N.3.30.7016	3W	4000K	270
TECH ROUND.V2.AC.N.4.30.7016	4W	4000K	360
TECH ROUND.V2.AC.N.6.30.7016	6W	4000K	540

## Ordering Details-Double way

TECH ROUND.V2.AC.N.6.30.7016	2x3W	4000K	270x2
TECH ROUND.V2.AC.N.8.30.7016	2x4W	4000K	360x2
TECH ROUND.V2.AC.N.12.30.7016	2x6W	4000K	540x2

## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX