

CESAR MINI AC

Linear Type Wallwasher



The standard design makes it easy to combine the three different sizes. Linear Suurfaced wallwasher. The powder coated surface completes the attractive, clear appearance.

To guarantee durability, high-quality materials such as corrosion resistant aluminium, toughened glass and stainless steel are used. An innovative ventilation system prevents condensation. The robust, dust proof housing, which is also protected against sprayed water, allows this lighting tool to be used for many years without any damage or maintenance. Thanks to the ytilibixeflof the base element, CESAR achieves to meet every need for lighting in several sdlefi of application: walls, surfaces of vehicular ,cfifart pathways, gardens and parks.

Luminaire comes with 2 sides cable as standard.

Characteristics

Aluminium Injection Die Cast Body

Electrostatic Powder Paint

Optional RAL Colors

Extra Clear 5mm Tempered Glass

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

ENEC Certified Driver



Key Advantages

- High corrosion resistance
- High IP protection
- Excellent light output
- High Ambient temperature
- Easy installation

Applications



Landscape



Outdoor




Urban



Architectural

CESAR MINI WALL WASHER

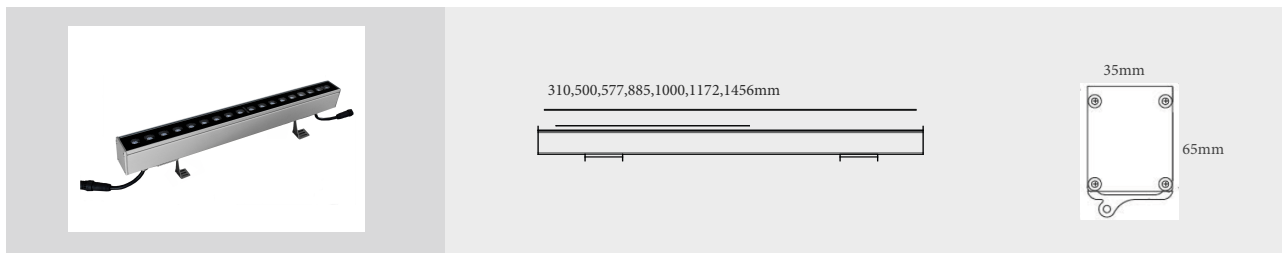


Standard Product

Input	100-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
Brackets	Stainless Steel
CRI	> 82
Protection	IP67
Impact Resistance	IK10
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
Glass	Frosted Diffuser Glass
CRI	> 90
Protection	IP68
Warranty	7-10 Years


Light Colors



Ordering Details

Product Code	Power	Length	Light Color	Lumen
CESARMINIAC.9.310.N.4.30	9	310mm	4000K	1350
CESARMINIAC.14.310.N.4.30	14	310mm	4000K	2100
CESARMINIAC.18.500.N.4.30	18	500mm	4000K	2700
CESARMINIAC.36.577.N.4.30	36	577mm	4000K	5400
CESARMINIAC.27.885.N.4.30	27	885mm	4000K	4050
CESARMINIAC.54.1000.N.4.30	54	1000mm	4000K	8100
CESARMINIAC.36.1172.N.4.30	36	1172mm	4000K	5400
CESARMINIAC.72.1456.N.4.30	72	1456mm	4000K	10800


Body Colors Options



* Products are shown at 30 degrees.

* For different options, please contact our team.

Beam Angle Options

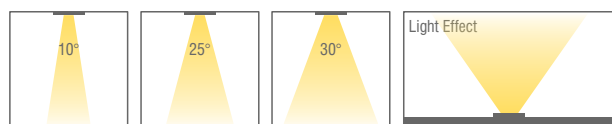

Optional Accessories



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	XX	AC DC	ON/OFF 1-10V PUSH TRIAC DALI	2K 4K 6.5K	XX	XX
XX XX	AC DC	N V	P T D	3 4 6	XX XX	

* We reserve the right to change specifications without prior written notice

www.hb-lux.com