


SATIN LINE SQ

With optic lens

LED BAR
Surface mounted

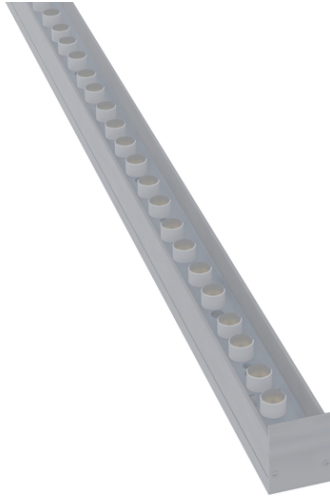

Aluminum extruded body
UV protected High homogenous light diffusion
with high-quality diffuser
Optic lens
Aluminum mounting brackets
Production in different lengths
Daisy-chain connection topology
up to 10 meters
ENEC Standards





Basic Options

Light source color	3000K-4000K-6500K
Control interface	On/Off
Protection class IEC	Class II
CE Mark	Yes
ENEC Standards	Yes
Warranty Period	5 years
Input Voltage	24V/ DC
LM80	>54 000 Hours
MacAdams	3 step MacAdams
Wind Catching Area	0.13 m2
Power Factor (Min)	0.95
Ambient temperature	-25 °C to +60 °C
Color Rendering Index	CRI>80

CUSTOMIZED OPTIONS

LED Color	RED-GREEN-BLUE-AMBER
Connectors	IP 68 Conenctors
Light source	Mid Power LED on Alum PCB
Diffuser	Opaque Diffuser
Control System	Dynamic White- RGB- RGBW
Light Distribution	12°/20°/34°/45°/60°/Asm/ Wallwasher Optics
Color Rendering Index	CRI>90

ELECTRICAL OPTIONS

Input Voltage	24V/ DC
Input Frequency	DC

BODY OPTIONS

Housing	Extruded Extrusion
Gasket	Silicone
Protection rating	IP 67
Impact resistance	IK09
Diffusor	Clear transparent
Screws	316 stainless steel
End Caps	Aluminium Extrusion
Weight	316 stainless steel

CONNECTION

Connection Cable	Silicon Cable 30cm- 3x1.5 mm2
------------------	-------------------------------




ORDERING DETAILS

PRODUCT CODE	W	Length	Temp	Lumen*
SATINLINESQ.OL.5.1000.4	5W	1000mm	4000K	650Lm
SATINLINESQ.OL.8.1000.4	8W	1000mm	4000K	1040Lm
SATINLINESQ.OL.12.1000.4	12W	1000mm	4000K	1560Lm
SATINLINESQ.OL.14.1000.4	14W	1000mm	4000K	1820Lm
SATINLINESQ.OL.16.1000.4	16W	1000mm	4000K	2080Lm
SATINLINESQ.OL.18.1000.4	18W	1000mm	4000K	2340Lm

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX	XX	XX	0V/0V 1-10V PUSH TRIAC DALI	4K 3K 6.5K	XX
XX XX	XX	XX	N V P T D	3 4 6	XX

Technical Drawing

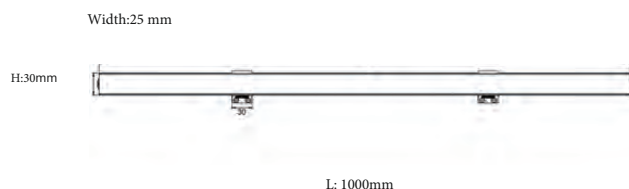

Connection Diagram

