


COSMO TRIO SQUARE

recessed type
downlight



Aluminum injection body
Tempered glass
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC Standards

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
▲	Light Beam 23°, 37°, 51°
W	White Body Color

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
CSMO3SQ.21.117x365.N.4.23	21	65	117x365	Ø105x3	4000K	2310
CSMO3SQ.21.117x365.N.4.37	21	65	117x365	Ø105x3	4000K	2290
CSMO3SQ.21.117x365.N.4.51	21	65	117x365	Ø105x3	4000K	2270
CSMO3SQ.30.117x365.N.4.23	30	65	117x365	Ø105x3	4000K	3210
CSMO3SQ.30.117x365.N.4.37	30	65	117x365	Ø105x3	4000K	3290
CSMO3SQ.30.117x365.N.4.51	30	65	117x365	Ø105x3	4000K	3270


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX XX XX	XX XX XX	1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX XX XX	N	V	P T D	3 4 6	XX

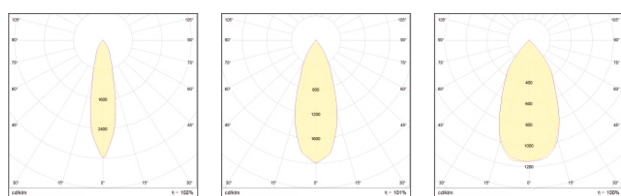

TECHNICAL DRAWINGS

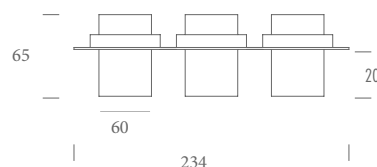

* For different options, please contact our team.