LINERES ALFA

pendant & surface type
linear lighting

Aluminum extruded body
Opal Polycarbonate diffuser
Adjustable length steel ropes
Nickel plated brass parts
Constant current LED driver
Electrostatic powder coating paint
Production in different lengths
Optional body colors
ENEC standards

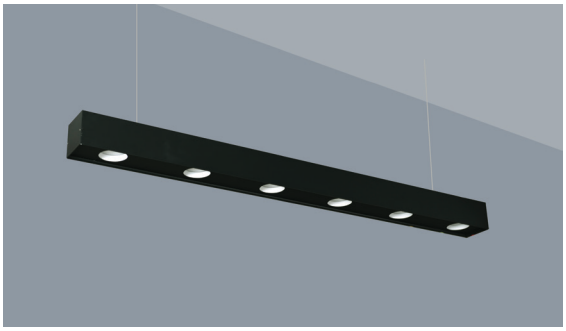

LED | IP20 INT | CRI >80 | 60.000h L80 | McAdam C3

MADE IN TURKEY | RoHS compliant





PRODUCT CODE	W	Lenght	Temp	Lumen*
LINERESALFA3.18.600.N.4.95	18	600	4000K	1693
LINERESALFA6.36.1200.N.4.95	36	1200	4000K	3386
LINERESALFA12.72.2400.N.4.95	72	2400	4000K	6772

* Can be customized..

BASIC OPTIONS

on/off	on/off Control (No Dimmable
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 95°
	Operating Temperature : -20 / 40 °C
B	Black Body Color

PRODUCT CODING

Product Name	Product Power	Product Size		Control System				Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX
XX	XX	XX	N	V	P	T	D	3	4	6	XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Emergency KIT	Pendant or Surface Type
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	E	M

TECHNICAL DRAWINGS

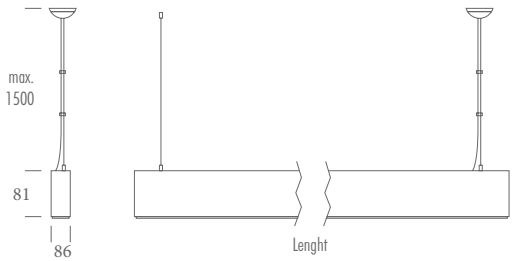

** For different options, please contact our team.*