


LOTA

recessed type
downlight



Aluminum injection body
Tempered glass
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC Standards



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
LOTA.7.117.N.4.20	7	60	Ø117	Ø105	4000K	770
LOTA.7.117.N.4.47	7	60	Ø117	Ø105	4000K	750
LOTA.10.117.N.4.20	10	60	Ø117	Ø105	4000K	1070
LOTA.10.117.N.4.47	10	60	Ø117	Ø105	4000K	1050
LOTA.13.117.N.4.20	13	60	Ø117	Ø105	4000K	1430
LOTA.13.117.N.4.47	13	60	Ø117	Ø105	4000K	1410

* According to 4000K light temperature

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K Light
▲	Beam 20°, 47°
W	White Body Color



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX	XX XX	XX XX	1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX XX	XX XX	XX XX	N V P T D	3 4 6	XX

TECHNICAL DRAWINGS

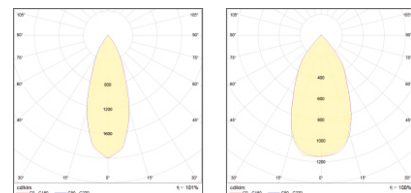

* For different options, please contact our team.