


STONES

Outdoor type
LED Bollard Lighting

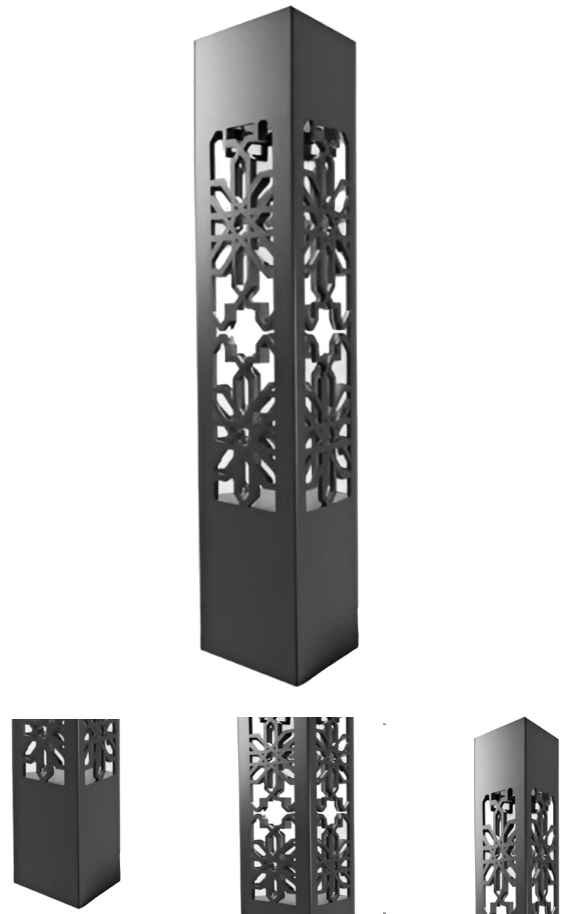

With the straight lines and robust design of STONES Bollard, we have made a clear design statement with a reduced, cubic laser cut design approach which gives its soft light an exceedingly stylish frame.

The light source cannot be seen directly, and so the lighting is pleasantly detected with the laser design. The symmetrical light distribution creates harmonious illumination. The light falls from above into the glassless.

Characteristics

- Aluminium body
- High Efficiency LED Lighting
- PMMA acrylic light diffuser
- Electrostatic powder paint
- High quality silicon gasket
- Anchor system
- LED with Life Span > 100.000 Hours
- CCT tolerance within a 3 step MacAdams ellipse
- Corrosion Protection
- 5 Years Warranty
- Marine Coating (Optional)
- ENEC Certified Driver


Key Advantages

- Laser light reflection
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- Interesting light sculpture

Applications



STONES




Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C
Diffuser	Acrylic

Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years
Diffuser	Transparent or Opaque


Light Colors



Body Colors Options



Light Effect



Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
STONES.8.600.AC.N.4.SYM.7016	8W	4000K	600mm	1056
STONES.10.600.AC.N.4.SYM.7016	10W	4000K	600mm	1320
STONES.15.800.AC.N.4.SYM.7016	15W	4000K	800mm	1980
STONES.20.800.AC.N.4.SYM.7016	20W	4000K	800mm	2640
STONES.25.1000.AC.N.4.SYM.7016	25W	4000K	1000mm	3300
STONES.30.1000.AC.N.4.SYM.7016	30W	4000K	1000mm	3960
STONES.25.1500.AC.N.4.SYM.7016	25W	4000K	1500mm	3300
STONES.30.1500.AC.N.4.SYM.7016	30W	4000K	1500mm	3960
STONES.35.2000.AC.N.4.SYM.7016	35W	4000K	2000mm	4620
STONES.40.2000.AC.N.4.SYM.7016	40W	4000K	2000mm	5280

* For different options, please contact our team.

Optional Accessories



IP67
Junction
Box

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX