

MARK WOOD

Outdoor Type Decorative Lighting
Poles




MARK WOOD is the pole light that integrates easily into any environment. with thin diffuser it produces direct light, with opal screen the perfect diffusion and homogeneity of light reduces the number of installations needed, optimizing consumption and reducing light pollution.

Available in different colour temperatures and powers, in order to meet any requirement of the lighting project. The urban lighting version is perfect for the illumination of city parks, squares or pedestrian areas.

Characteristics

Aluminium body, Wood Finish
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

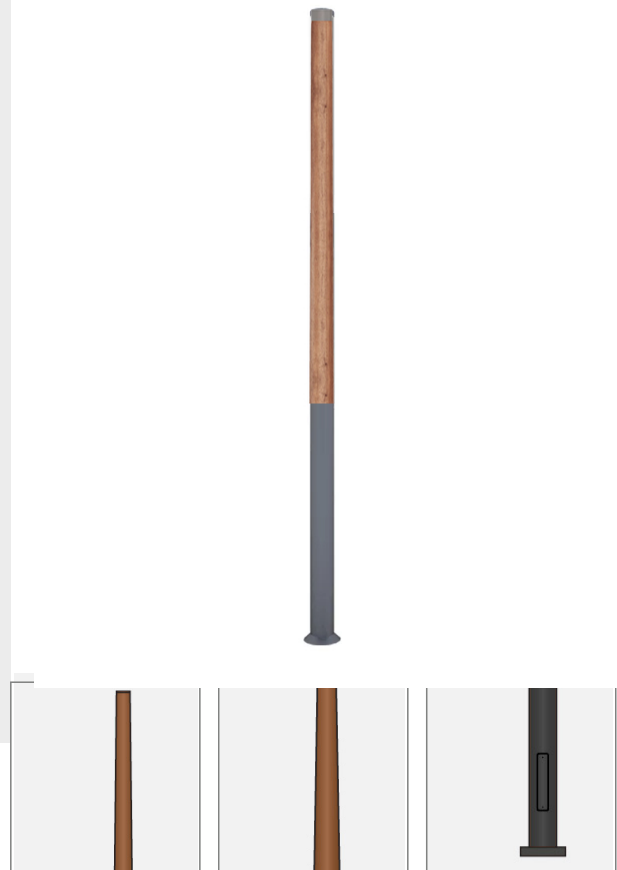


Key Advantages

- Aluminium Body
- Wooden Pole
- Smart energy savings
- Delivery of complete assembly
- Corrosion resistance

Applications



MARK WOOD

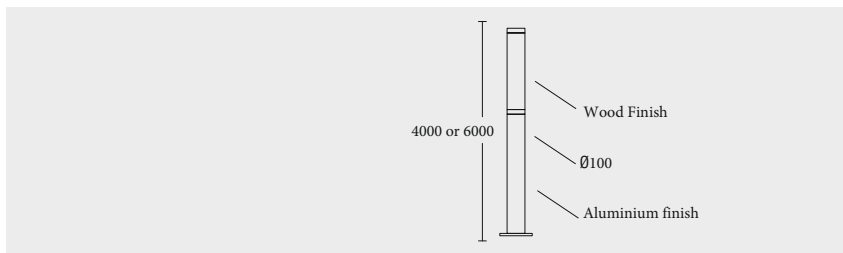

Standard Product


Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	-
Light Color	-
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options


** Possibility of production in different lengths and sections.*

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67
Warranty	7-10 Years


Light Colors



Body Colors Options

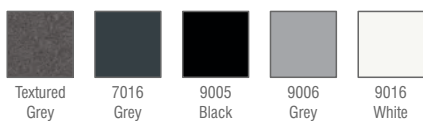

Light Effect



Optional Accessories



IP67
Junction
Box

Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
MARK.WOOD.35.AC.N.4.SYM.7016	W	-	6000	-
MARK.WOOD.45.AC.N.4.SYM.7016	W	-	6000	-
MARK.WOOD.55.AC.N.4.SYM.7016	W	-	6000	-
MARK.WOOD.65.AC.N.4.SYM.7016	W	-	6000	-
MARK.WOOD.75.AC.N.4.SYM.7016	W	-	6000	-

** For different options, please contact our team.*



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color								
XX	XX	AC	DC	on/off	1-3 DV	PUSH	TRAC	DALI	D	3K	4K	6.5K	XX	XX
XX	XX	AC	DC	N	V	P	T	D		3	4	6	XX	XX