

SANTO

Surface Mounted
Wall Luminaire



Flawless Wall mounted luminaire that steel numerous benefits in terms of installation, maintenance and operation with IP65. SANTO is a prime example of the immense power of puristic design. Without unnecessary frills; nothing distracts from the focus on the key essentials: powerful, homogeneous light in a perfectly sselwallcylindrical form.

The housing and technical components have been carefully selected to ensure economic yzneicfi feand a long service life for all products in the range.

Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

Extra Clear 5mm Tempered Glass

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection (Optional)

5 Years Warranty

Marine Coating (Optional)

COB LED & Power LED Options

Key Advantages

- Flawless form
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications



Exterior




Facade



Architectural




Ancient




Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	0,80 - 4,2 kg
Ambient Temperature	-30°C / +60°C

Light Colors




Body Colors Options



Light Effects



Beam Angle Options

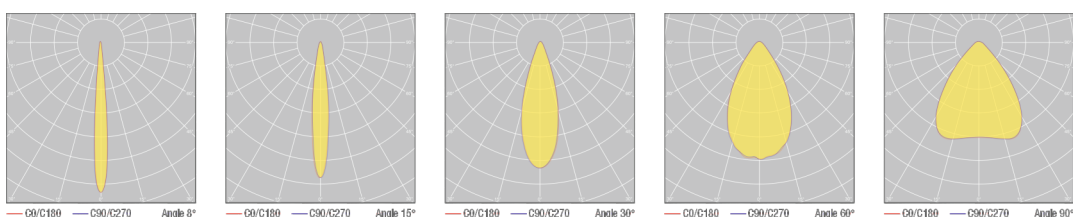

Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	30°, 60°, 90°
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years

Ordering Details

Product Code	Power	Light Color	Lumen
SANTO.5.AC.N.4.30.7016	5W	4000K	575
SANTO.6.AC.N.4.30.7016	6W	4000K	690
SANTO.7.AC.N.4.30.7016	7W	4000K	805
SANTO.10.AC.N.4.30.7016	10W	4000K	1150
SANTO.12.AC.N.4.30.7016	12W	4000K	1380
SANTO.13.AC.N.4.30.7016	13W	4000K	1495
SANTO.20.AC.N.4.30.7016	20W	4000K	2110

* For different options, please contact our team.

* Dimensions can be customized.

Product Coding

Product Name		Product Power		Input		Control System				Color Temperature			Light Beam		Body Color
XX	XX	AC	DC	0V/0V	1-10V	PUSH	TRAC	DALI		3K	4K	6.5K	XX	XX	XX
XX	XX	AC	DC	N	V	P	T	D		3	4	6	XX	XX	XX