


SALUT V1

Outdoor Type
Decorative Lighting Poles

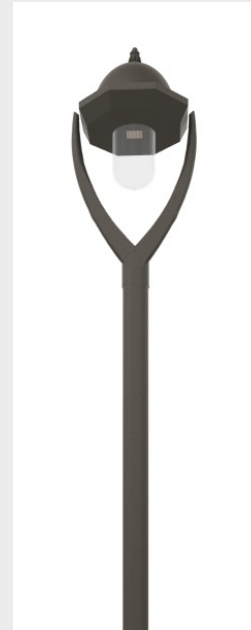

Urban lighting between versatility and high visual comfort. SALUT is the pole top luminaire for urban lighting, featuring a catchy shape and excellent performance, also available with the latest lighting technologies.

Wide range of optics, powers and color temperatures to meet any lighting project need. Featuring an elegant, timeless design, excellent performance and fort he latest lighting designs. Its diffused wide optic provides a homogeneous, pleasant lighting with high visual comfort and no glare.

Characteristics

Aluminum Head
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

Key Advantages

- Aluminium Body
- Smart energy savings
- Delivery of complete assembly
- Corrosion resistance
- BULB or LED Verison
- Decorative Lighting
- Elec Galv or Hot Dip Galvanized Steel Pole

Applications




Landscape

Outdoor

Urban

SALUT V1

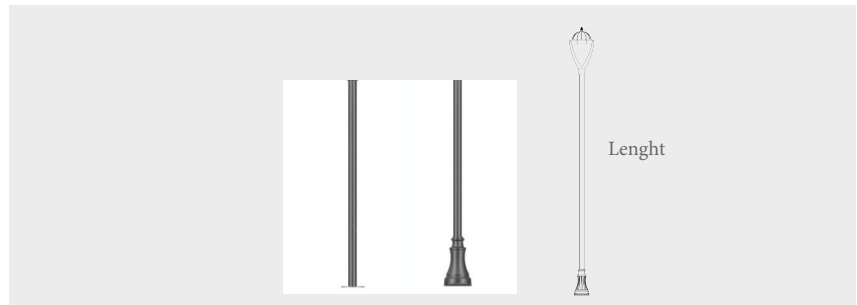


Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK08
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C
Diffuser	Transparent Diffuser

Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67
Warranty	7-10 Years

Light Colors




Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
SALUT.25.4000.AC.N.4.SYM.7016	25W	4000K	2500	3300
SALUT.30.4000.AC.N.4.SYM.7016	30W	4000K	4000	3960
SALUT.30.4000.AC.N.4.SYM.7016	30W	4000K	4000	3960
SALUT.40.4000.AC.N.4.SYM.7016	40W	4000K	4000	5280
SALUT.60.4000.AC.N.4.SYM.7016	60W	4000K	4000	7920
SALUT.35.5000.AC.N.4.SYM.7016	35W	4000K	5000	3960
SALUT.40.5000.AC.N.4.SYM.7016	40W	4000K	5000	5280
SALUT.50.5000.AC.N.4.SYM.7016	50W	4000K	5000	6600
SALUT.60.5000.AC.N.4.SYM.7016	60W	4000K	5000	7920
SALUT.40.6000.AC.N.4.SYM.7016	40W	4000K	6000	5280
SALUT.50.6000.AC.N.4.SYM.7016	50W	4000K	6000	6600
SALUT.60.6000.AC.N.4.SYM.7016	60W	4000K	6000	7920
SALUT.80.6000.AC.N.4.SYM.7016	80W	4000K	6000	10560
SALUT.100.6000.AC.N.4.SYM.7016	100W	4000K	6000	13200
SALUT.60.8000.AC.N.4.SYM.7016	60W	4000K	8000	7920
SALUT.80.8000.AC.N.4.SYM.7016	80W	4000K	8000	10560
SALUT.90.8000.AC.N.4.SYM.7016	90W	4000K	8000	11880
SALUT.100.8000.AC.N.4.SYM.7016	100W	4000K	8000	13200

Body Colors Options




Light Effect



Optional Accessories



IP67 Junction Box



Standard Base



Decorative Base



*Lenght is included Head Dimensions.
*Standard or Decorative Base Options.
**Possibility of production in different lengths and powers

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	XX	AC DC	push/off 1-3 DV PUSH TRAC DALI	3K 4K 6.5K	XX	XX