

AURA TRACK

Track type lighting fixture

Track mounted

Aluminum extruded body

UV protected diffuser

Adjustable length steel ropes

Nickel plated brass parts

Constant current LED driver

Electrostatic powder coating paint

Production in different lengths

Optional body colors

ENEC standards





PRODUCT CODE	W	Length	Temp	Lumen*
AURA TRACK.11.500.N.4.120	11	500	4000K	1133
AURA TRACK.16.500.N.4.120	16	500	4000K	1648
AURA TRACK.15.600.N.4.120	15	600	4000K	1725
AURA TRACK.18.600.N.4.120	18	600	4000K	1854
AURA TRACK.20.800.N.4.120	20	800	4000K	2300
AURA TRACK.22.1000.N.4.120	22	1000	4000K	2266
AURA TRACK.25.1000.N.4.120	25	1000	4000K	2575
AURA TRACK.32.1000.N.4.120	32	1000	4000K	3296
AURA TRACK.32.1100.N.4.120	30	1100	4000K	3450
AURA TRACK.27.1200.N.4.120	27	1200	4000K	2781
AURA TRACK.28.1200.N.4.120	28	1200	4000K	2884
AURA TRACK.39.1200.N.4.120	39	1200	4000K	4017
AURA TRACK.30.1300.N.4.120	30	1300	4000K	3090
AURA TRACK.36.1400.N.4.120	36	1400	4000K	3708
AURA TRACK.33.1500.N.4.120	33	1500	4000K	3399
AURA TRACK.45.1500.N.4.120	45	1500	4000K	4635
AURA TRACK.48.1500.N.4.120	48	1500	4000K	4944
AURA TRACK.45.1800.N.4.120	45	1800	4000K	5175
AURA TRACK.48.1800.N.4.120	48	1800	4000K	4944
AURA TRACK.44.2000.N.4.120	44	2000	4000K	4532
AURA TRACK.54.2000.N.4.120	54	2000	4000K	5562
AURA TRACK.64.2000.N.4.120	64	2000	4000K	6592
*AURA TRACK.44.2500.N.4.120	44	2500	4000K	5060
AURA TRACK.64.2500.N.4.120	64	2500	4000K	6510
AURA TRACK.65.3000.N.4.120	65	3000	4000K	6695
AURA TRACK.96.3000.N.4.120	96	3000	4000K	9888

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	on/off	1-10V	PUSH	TRAC	DALI
XX XX XX	N	V	P	T	D
				3 4 6	XX

TECHNICAL DRAWINGS

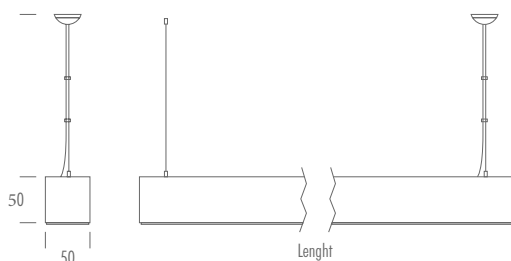


BASIC OPTIONS

- on/off** on/off Control (No Dimmable)
- 230V AC** Input Voltage 220-240V/AC, 50-60HZ
- CRI >80** Color Rendering Index > 80
- 4K** Light Temperature 4000K
- Light Beam 120°**
- Operating Temperature** : -20 / 40 °C
- B** Black Body Color

CUSTOMIZE OPTIONS

- Dimmable 1-10V**
- Dimmable PUSH**
- Dimmable TRIAC**
- Dimmable DALI**
- Input Voltage 24V/DC**
- Light Temperature 3000K**
- Light Temperature 6500K**
- Dynamic White**
- Color Rendering Index > 90**
- Optional Body Color**
- Emergency KIT**
- Pendant or Surface Type**



* For different options, please contact our team.