

LED pendant type lighting fixture



- Aluminum Injection Body
- Adjustable length steel ropes
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional Body Colors
- ENEC Standards,



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC - 50/60 Hz 5
CRI > 80	Color Rendering Index >82
4K	Light Temperature 4000K
▲	Light Beam 120°
●	Black Body Color
B	-20C°/+40C° Temperature

PRODUCT CODE	W	Diameter	Temp	Lumen
DOLLY.E2.N.4.120	E27	250	4000K	


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	White Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	○	W	E

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX	XX	XX	N V P T D	3 4 6	XX



TECHNICAL DRAWINGS

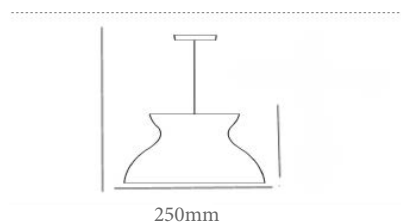

* For different options, please contact our team.