


COLT V2

Outdoor type
LED Bollard Lighting

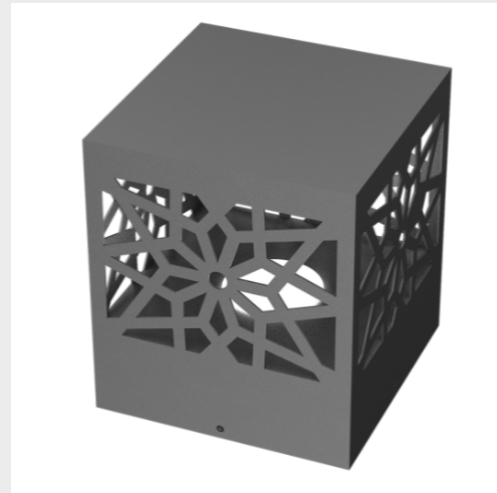

Besides lighting the surrounding environment, the light plays with the lamp-object by revealing and enhancing the volumes. COLT V2 in all its varieties, is an aesthetically pleasing object also when switched-off.

Designed for decorative lighting, COLT V2 is a cubic lamp with a customizable perforated cage made of Aluminium. To restore ambient lighting, the luminaire is equipped with a IP54 a integrated driver. Equipped with a discreet locking mechanism and tool-less entry for maintenance. Suitable for adding a touch of elegance to a private pathway.

Characteristics

Aluminium body
High efficiency LED lighting
PMMA light diffuser
Electrostatic powder paint
High quality silicon gasket
Galvanized metal anchorage
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

Key Advantages

- Shaped lighting
- Small size
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications



Landscape




Outdoor



Urban

COLT V2

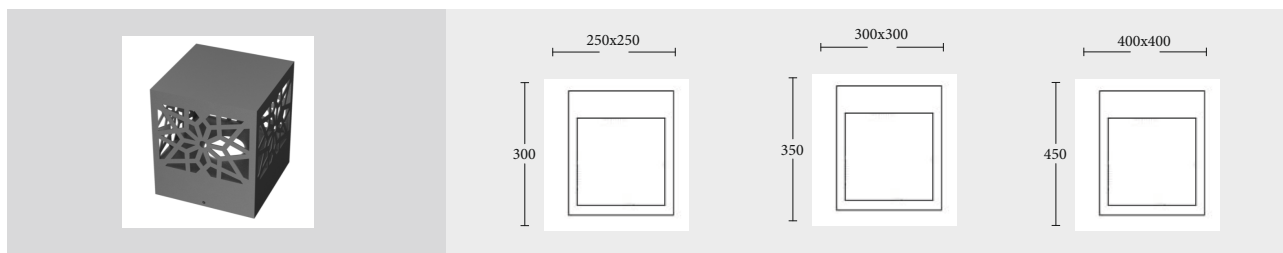


Standard Product

Input	220-240V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	> 82
Protection	IP54
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C


Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	> 90
Protection	IP66-IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years
Diffuser	Transparent or Opaque


Light Colors



Body Colors Options



Light Effect



Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
COLTV2.10.AC.N.4.SYM.7016	10W	4000K	250x250x300	1010
COLTV2.20.AC.N.4.SYM.7016	20W	4000K	250x250x300	2020
COLTV2.30.AC.N.4.SYM.7016	30W	4000K	250x250x300	3030
COLTV2.40.AC.N.4.SYM.7016	40W	4000K	250x250x300	4040
COLTV2.10.AC.N.4.SYM.7016	10W	4000K	300x300x350	1010
COLTV2.20.AC.N.4.SYM.7016	20W	4000K	300x300x350	2020
COLTV2.30.AC.N.4.SYM.7016	30W	4000K	300x300x350	3030
COLTV2.40.AC.N.4.SYM.7016	40W	4000K	300x300x350	4040
COLTV2.10.AC.N.4.SYM.7016	10W	4000K	400x400x450	1010
COLTV2.20.AC.N.4.SYM.7016	20W	4000K	400x400x450	2020
COLTV2.30.AC.N.4.SYM.7016	30W	4000K	400x400x450	3030
COLTV2.40.AC.N.4.SYM.7016	40W	4000K	400x400x450	4040

* For different options, please contact our team.



Optional Accessories



IP67
Junction
Box

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	AC DC	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX XX	XX XX	
XX XX	AC DC	N V P T D	3 4 6	XX XX		