




# GLOBE SQUARE

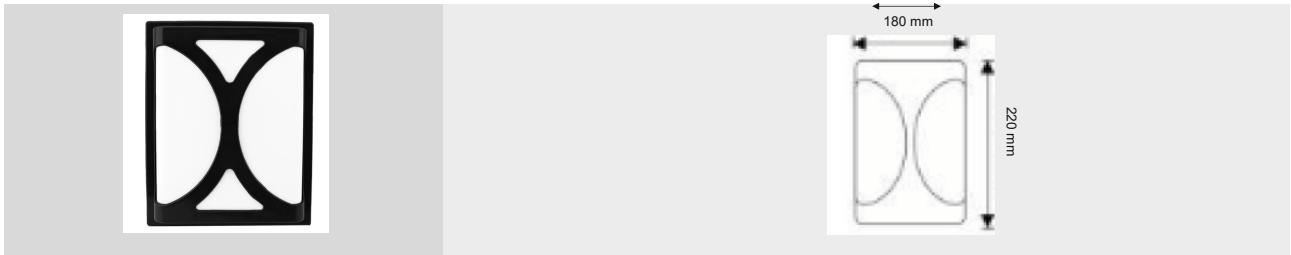


## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	120°
Light Color	4000K
Body Color	9005 Black
CRI	>82
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	2,73 kg
Ambient Temperature	-30°C / +60°C

## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years
Emergency	3H Emergency Kit

## Light Colors




## Ordering Details


Product Code	Power	Light Color	Lumen
TRIPGLOBE.15.AC.N.4.120.9005	15W	4000K	1640
TRIPGLOBE.20.AC.N.4.120.9005	20W	4000K	2250
TRIPGLOBE.30.AC.N.4.120.9005	30W	4000K	3010

\* For different options, please contact our team.

## Body Colors Options

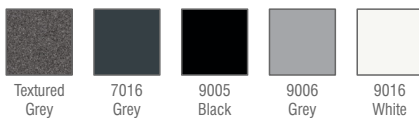

## Beam Angle Options

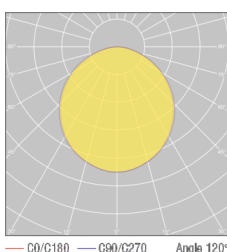

## Product Coding

Product Name	Product Power	Input		Control System				Color Temperature			Light Beam	Body Color	
XX	XX	AC	DC	on/off	1-10V	PUSH	TRAC	DALI	3K	4K	6.5K	XX	XX
XX	XX	AC	DC	N	V	P	T	D	3	4	6	XX	XX