

NAIK 100

LED surface type
downlight



- Aluminum extrusion body
- Aluminum heatsink
- High efficiency reflector
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



PRODUCT CODE	W	Length	Temp	Lumen
NK100.10.100.N.4.12	10	Ø100	4000K	1120
NK100.12.100.N.4.12	12	Ø100	4000K	1344
NK100.18.100.N.4.12	18	Ø100	4000K	2016
NK100.22.100.N.4.12	22	Ø100	4000K	2464
NK100.30.100.N.4.12	30	Ø100	4000K	3360

* According to 4000K light temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >82
4K	Light Temperature 4000K
▲	Light Beam 12°,24°,36°
w	White Body Color

PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	PUSH	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	▲
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

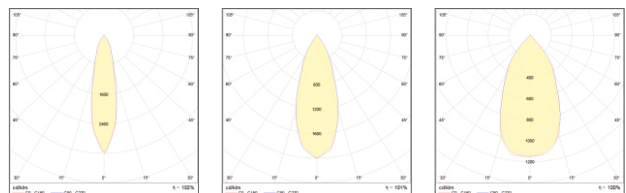

* For different options, please contact our team.