

ALTO L TRACK

track type

spotlight

hblux
LIGHTING

Aluminum injection body
Adjustable head
Anti glare lens
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC driver
ENEC standards



LED	230V	IP20	CRI >82	60.000h L80	McAdam C3	CE	TSE
-----	------	------	---------	-------------	-----------	----	-----

PRODUCTCODE	W	Lenght	Temp	Lumen*
ALTOLTRACK.20.300.N.4.30	20	300	4000K	2460
ALTOLTRACK.25.300.N.4.30	25	300	4000K	3075
ALTOLTRACK.30.300.N.4.30	30	300	4000K	3690
ALTOLTRACK.35.300.N.4.30	35	300	4000K	4305

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >82
4K	Light Temperature 4000K
▲	Light Beam 15°,30°,45°,60°,90°
B	Black Body Color



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX
XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX	XX XX XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

TECHNICAL DRAWINGS

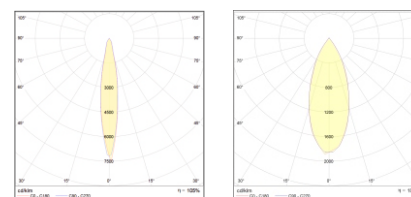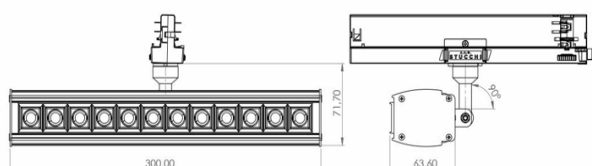

* For different options, please contact our team.

*We reserve the right to change specifications without prior written notice

www.hb-lux.com