




- pendant & surface type
- Circular lighting fixture
- Anti-glare optical lens
- Aluminum extruded body
- UV protected diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC standards

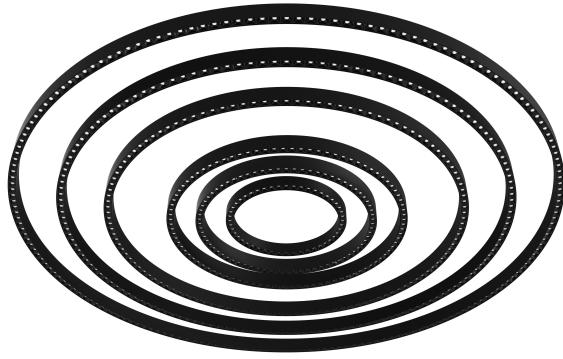


BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI > 80	Color Rendering Index > 82
4K	Light Temperature 4000K
Light Beam 120°	
Operating Temperature : -20 / 40 °C	
B	Black Body Color

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Emergency KIT	Pendant or Surface Type
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	E	M



* For different options, please contact our team.

GROUP	PRODUCT CODE	W	Lenght	Temp	Lumen
A1	MULTI LOOP LINERES.22.400.N.4.120	22	Ø400	4000K	1980
A2	MULTI LOOP LINERES.35.600.N.4.120	35	Ø600	4000K	3145
A3	MULTI LOOP LINERES.50.800.N.4.120	50	Ø800	4000K	4500
A4	MULTI LOOP LINERES.77.1200.N.4.120	77	Ø1200	4000K	6930
A5	MULTI LOOP LINERES.90.1500.N.4.120	90	Ø1500	4000K	8600
A6	MULTI LOOP LINERES.106.1800.N.4.120	106	Ø1800	4000K	8478
A7	MULTI LOOP LINERES.140.1800.N.4.120	140	Ø1800	4000K	12600

example: * MULTI LOOP LINERES.X.A1.A3.N.4.120

example: * MULTI LOOP LINERES.X.A2.A4.A6.N.4.120


* ...
*
*
* MULTI LOOP LINERES.X.X1.X2.N.4.120

X1:Refer bu letter to group

X2:Refer bu letter to group

* According to 4000K light temperature

TECHNICAL DRAWINGS



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX	XX	XX	N V P T D	3 4 6	XX