

# PERA TRACK

track type

spotlight

Aluminum injection body

Tempered glass

Adjustable head

Constant current LED driver

Electrostatic powder coating paint

Optional body colors

ENEC driver

ENEC standards



| PRODUCTCODE        | W  | Height | Lenght | Temp  | Lumen |
|--------------------|----|--------|--------|-------|-------|
| PERA.15.160.N.4.24 | 15 | 100    | Ø160   | 4000K | 1965  |
| PERA.18.160.N.4.24 | 18 | 100    | Ø160   | 4000K | 2358  |
| PERA.20.160.N.4.24 | 20 | 100    | Ø160   | 4000K | 2620  |
| PERA.25.160.N.4.24 | 25 | 100    | Ø160   | 4000K | 3275  |
| PERA.30.160.N.4.24 | 30 | 100    | Ø160   | 4000K | 3930  |
| PERA.35.160.N.4.24 | 35 | 100    | Ø160   | 4000K | 4585  |
| PERA.40.160.N.4.24 | 40 | 100    | Ø160   | 4000K | 5240  |
| PERA.45.160.N.4.24 | 45 | 100    | Ø160   | 4000K | 5895  |

## BASIC OPTIONS

|         |                                                  |
|---------|--------------------------------------------------|
| on/off  | on/off Control (No Dimmable)                     |
| 230V AC | Input Voltage 230V/AC                            |
| CRI >80 | Color Rendering Index > 82                       |
| 4K      | Light Temperature 4000K                          |
| ▲       | Light Beam 8°, 15°, 18°, 24°, 30°, 36°, 45°, 60° |
| W       | White Body Color                                 |



## PRODUCT CODING

| Product Name | Product Power | Product Size | Control System | Color Temperature | Light Beam |
|--------------|---------------|--------------|----------------|-------------------|------------|
| XX XX XX     | XX XX XX      | XX XX XX     | XX XX XX       | XX XX XX          | XX XX XX   |
| XX XX XX     | XX XX XX      | XX XX XX     | XX XX XX       | XX XX XX          | XX XX XX   |

## CUSTOMIZE OPTIONS

|                |               |                |               |                      |                         |                         |               |                            |                  |               |
|----------------|---------------|----------------|---------------|----------------------|-------------------------|-------------------------|---------------|----------------------------|------------------|---------------|
| Dimmable 1-10V | Dimmable PUSH | Dimmable TRIAC | Dimmable DALI | Input Voltage 24V/DC | Light Temperature 3000K | Light Temperature 6500K | Dynamic White | Color Rendering Index > 90 | Black Body Color | EMERGENCY KIT |
| 1-10V          | PUSH          | TRIAC          | DALI          | 24V DC               | 3K                      | 6.5K                    | DYN           | CRI >90                    | B                | G             |

## TECHNICAL DRAWINGS

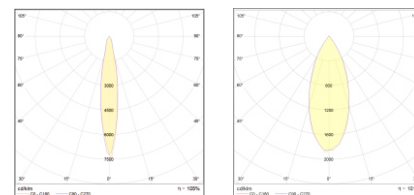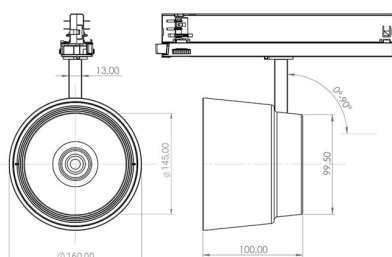

\* For different options, please contact our team.