


LED Acoustic/Pendant type & Surface

Circular LED lighting fixture

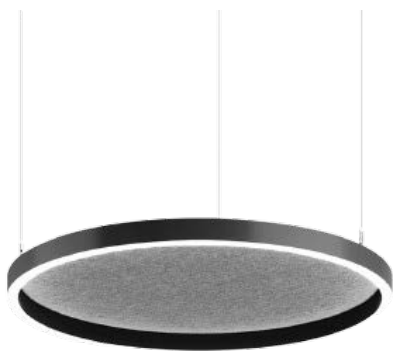

Acoustic body

Aluminum Injection Body

Adjustable length steel ropes

Constant current LED driver

Electrostatic powder coating paint

Production in different lengths

Optional Body Colors

ENEC Standards,

LED	230V	IP20 INT	CRI >82			60.000h L80	McAdam C3	CE	ES
-----	------	-------------	------------	--	--	----------------	--------------	----	----


BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC - 50/60 Hz 5
CRI >80	Color Rendering Index >82
4K	Light Temperature 4000K
	Light Beam 120°
	Black Body Color
B	-20°C/+40°C Temperature

PRODUCT CODE	W	Diameter	Temp	Lumen
STARK ACO.60.300.N.4.120	60	300	4000K	12600lm
STARK ACO.65.400.N.4.120	65	400	4000K	11550lm
STARK ACO.70.500.N.4.120	70	500	4000K	13650lm
STARK ACO.80.600.N.4.120	80	600	4000K	8400lm
STARK ACO.90.700.N.4.120	90	700	4000K	9450lm
STARK ACO.100.800.N.4.120	100	800	4000K	10500lm
STARK ACO.110.1000.N.4.120	110	1000	4000K	11550lm
STARK ACO.120.1200.N.4.120	120	1200	4000K	12600lm
STARK ACO.130.1500.N.4.120	130	1500	4000K	13650lm
STARK ACO.140.1800.N.4.120	140	1800	4000K	14700lm
STARK ACO.145.2000.N.4.120	145	2000	4000K	14700lm

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	White Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90		W	E




*According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX	XX	1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX	XX	XX	N V P T D	3 4 6	XX

TECHNICAL DRAWINGS

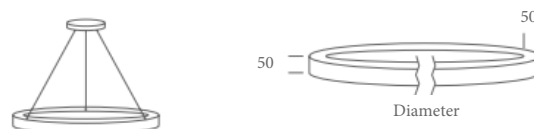

* For different options, please contact our team.