



# LINEA Trimless 50

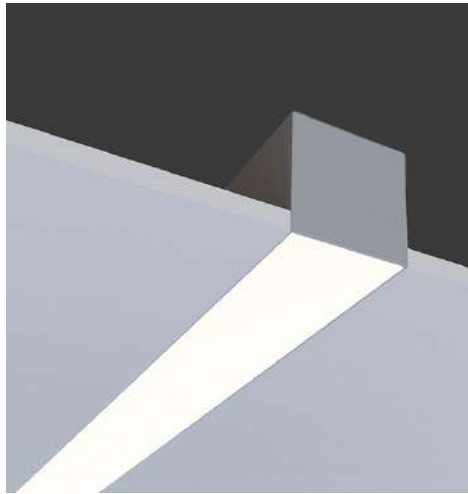

Recessed Trimless Type

Linear Lighting

Aluminum extruded body

Trimless Body

UV protected diffuser

Nickel plated brass parts

Constant current LED driver

Electrostatic powder coating paint

Production in different lengths

Optional body colors

ENEC standards



PRODUCT CODE	W	Length	Temp	Lumen*
LINEATR50.11.500.N.4.120	11	500	4000K	1133
LINEATR50.16.500.N.4.120	16	500	4000K	1648
*LINEATR50.15.600.N.4.120	15	600	4000K	1725
LINEATR50.18.600.N.4.120	18	600	4000K	1854
*LINEATR50.20.800.N.4.120	20	800	4000K	2300
LINEATR50.22.1000.N.4.120	22	1000	4000K	2266
LINEATR50.25.1000.N.4.120	25	1000	4000K	2575
LINEATR50.32.1000.N.4.120	32	1000	4000K	3296
LINEATR50.32.1100.N.4.120	30	1100	4000K	3450
LINEATR50.27.1200.N.4.120	27	1200	4000K	2781
LINEATR50.28.1200.N.4.120	28	1200	4000K	2884
LINEATR50.39.1200.N.4.120	39	1200	4000K	4017
LINEATR50.30.1300.N.4.120	30	1300	4000K	3090
LINEATR50.36.1400.N.4.120	36	1400	4000K	3708
LINEATR50.33.1500.N.4.120	33	1500	4000K	3399
LINEATR50.45.1500.N.4.120	45	1500	4000K	4635
LINEATR50.48.1500.N.4.120	48	1500	4000K	4944
*LINEATR50.45.1800.N.4.120	45	1800	4000K	5175
LINEATR50.48.1800.N.4.120	48	1800	4000K	4944
LINEATR50.44.2000.N.4.120	44	2000	4000K	4532
LINEATR50.54.2000.N.4.120	54	2000	4000K	5562
LINEATR50.64.2000.N.4.120	64	2000	4000K	6592
*LINEATR50.44.2500.N.4.120	44	2500	4000K	5060
LINEATR50.64.2500.N.4.120	64	2500	4000K	6510
LINEATR50.65.3000.N.4.120	65	3000	4000K	6695
LINEATR50.96.3000.N.4.120	96	3000	4000K	9888


\* According to 4000K light temperature

## BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 220-240V/AC, 50-60HZ
- Color Rendering Index > 80
- Light Temperature 4000K
- Light Beam 120°
- Operating Temperature : -20 / 40 °C
- Grey Body Color

## CUSTOMIZE OPTIONS


- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index > 90
- Optional Body Color
- Emergency KIT



## PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX XX XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	△
XX XX XX	N	V	P	T	D	3	4	6	XX		

## TECHNICAL DRAWINGS

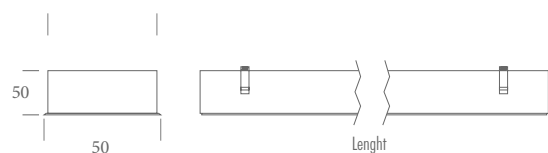

\* For different options, please contact our team.